

PART NO.: I-KP900E

Dimension: 100mmx91.5mm

DESCRIPTION: 304 Stainless steel 3DES encrypted pinpad for banking terminal,
ATM

MAIN FEATURE

Faceplate Dimensions: **100mmx91.5mm**

Dustproof, Water proof, Vandalism resistance, Shakeproof, Pickproof

Mounting type: Rear Mounting

No. of keys: **16keys**, high quality stainless steel.

Keyswitch Technology: Silicone switching element

keyswitch lifetime: > 5 million of operations.

Actuation Force/travel: 1N/0.45mm

Mounting Rack: Aluminum alloy

Lettering: laser engraved legends for excellent durability

G.W. 0.75kg

TECHNICAL DATA

- Lifespan :> 5 years.
- Interface: PS2, RS232 available.
- Supply Voltage: +5V DC +/-5%
- Protection Level: IP65; NEMA4X
- Operating temperature:-10C to +60C.
- Storage temperature: -20C to +70C.
- **CERT: Passed the certification of China Central Bank Card Testing Center, RoHS, CE and FCC.**

All languages version and interface are available on request.



HMI Components Division
Diamond Electronics Limited




+44 (0) 1477 505206

+44 (0) 1477 500656

sales@diamondhmi.co.uk

www.diamondhmi.co.uk

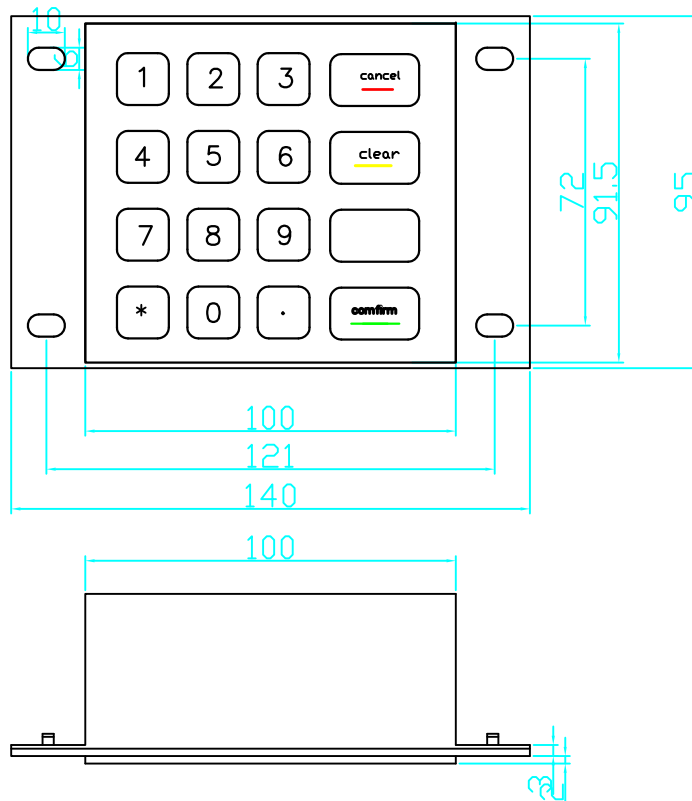

KP900



HMI Components Division
Diamond Electronics Limited



+44 (0) 1477 505206
+44 (0) 1477 500656
sales@diamondhmi.co.uk
www.diamondhmi.co.uk



HMI Components Division
Diamond Electronics Limited



+44 (0) 1477 505206
+44 (0) 1477 500656
sales@diamondhmi.co.uk
www.diamondhmi.co.uk