
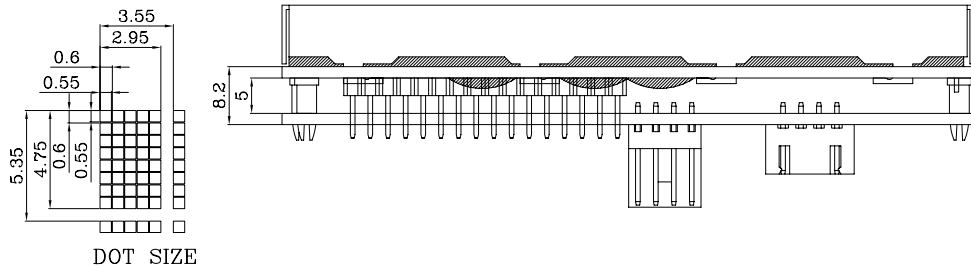
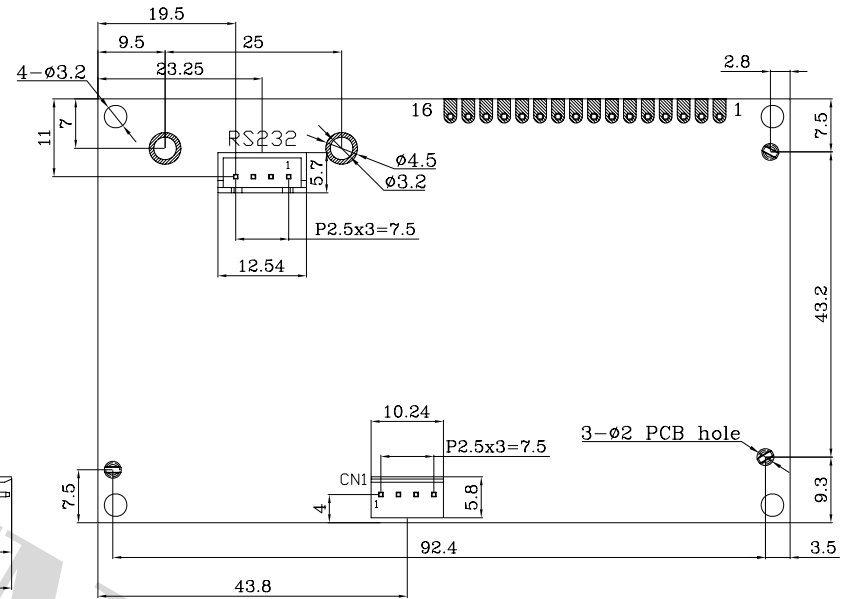
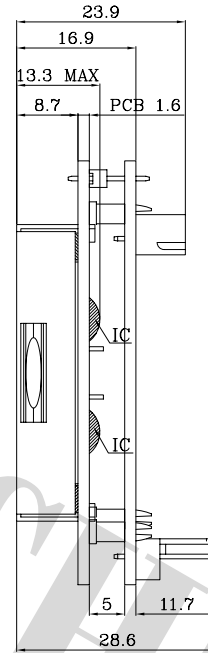


RoHS

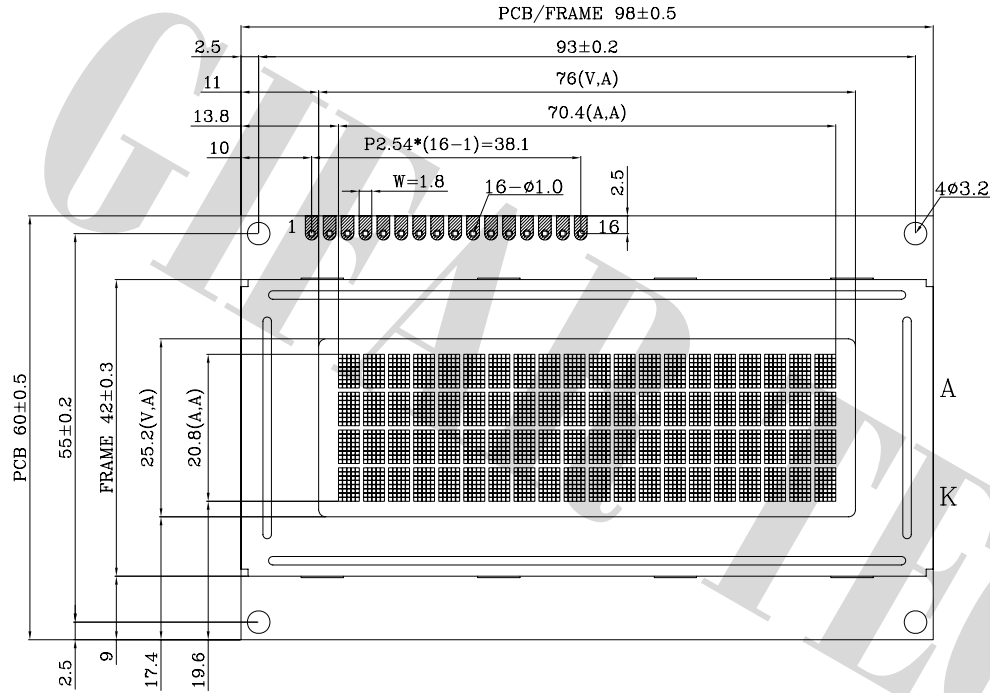

CN1

| NO. | SIGNAL |
|-----|--------|
| 1 | DC 5V |
| 2 | GND |
| 3 | GND |
| 4 | NC |

RS232

| NO. | SIGNAL |
|-----|--------|
| 1 | NC |
| 2 | RXD |
| 3 | TXD |
| 4 | GND |

NOTES:

1. DRIVE METHOD: VDD 5.0V
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE:STN(Y-G),TRANSFLECTIVE/POSITIVE.
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. BACKLIGHT-YELLOW&GREEN
7. INTERFACE: RS232.
8. NOT DIMENSION TOLERANCES IS ±0.2

| 日期 | 版本 | 修改内容 |
|----|----|------|
| | | |
| | | |
| | | |



晶發科技有限公司
GI FAR TECHNOLOGY CO., LTD

| | | | |
|-------------|------------|-------------------------|----------------------------------|
| DATE | 2011.01.27 | REV | X0 |
| UNIT : mm | Product : | GFR2004J-YPOE-JP | |
| SCALE : 1/1 | DRAWN : | Hazel | CHECKED : Kevin PAGE: 1/1 |
| SHEET : 1/1 | | | |