
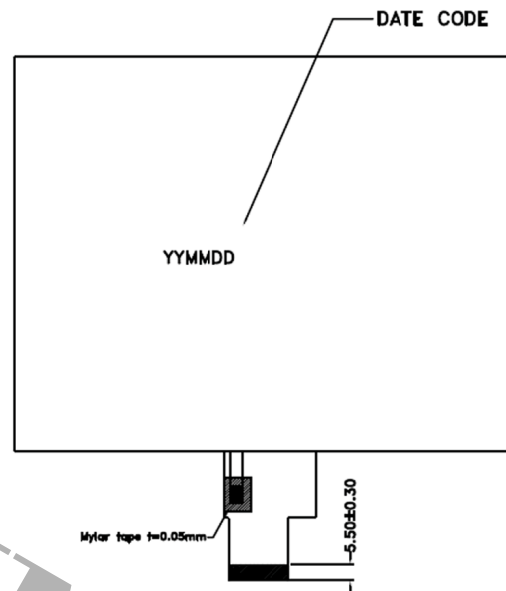
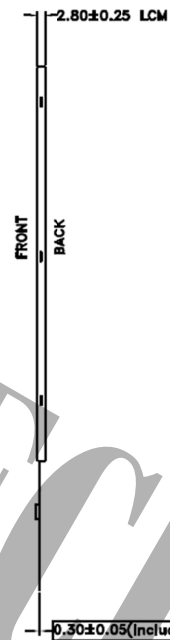


RoHS

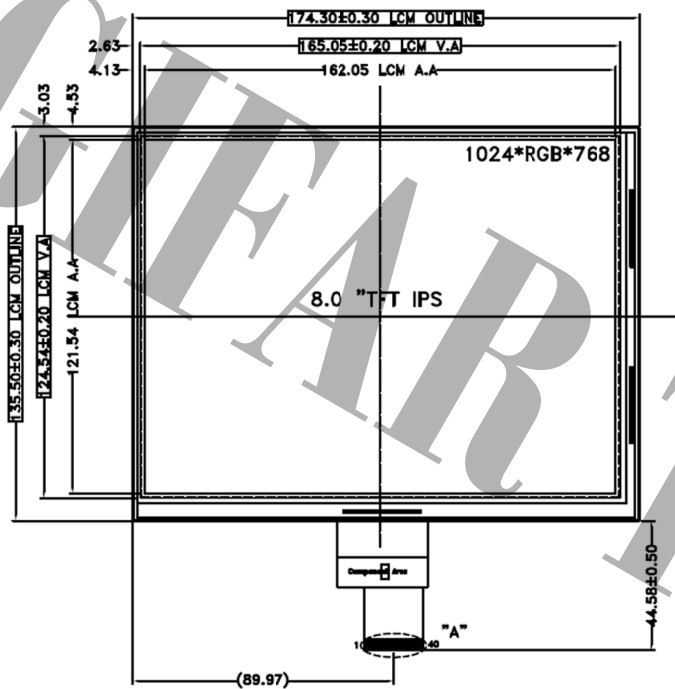


PIN DESCRIPTION

PIN	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	Reset
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+


Specification

1.LCD type: a-Si TFT active matrix , Normally Black , IPS mode ,RGB-stripe
2.Driver IC: TBD
3.View direction: ALL
4.Operating temp:-10° C~50° C, Storage temp: -20° C~60° C
5. Backlight: 24PCS White LED , Vf:9.0-10.8V; If:160mA , With LCM Luminace(cd/m ²):200(Min.)
6. Chromaticity Coordinales: Wx: 0.26~0.34 / Wy: 0.28~0.38
7.The tolerance unless classified ±0.30mm
8.Remark:ROHS

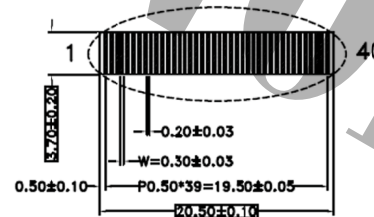

DETAIL "A"
Scale 4:1


電路圖 CIRCUIT DIAGRAM (LED3*8=24 dies)



NOTE:
1.():REFERENCE DIMENSION.
2. □ :IMPORTANT DIMENSION.

日期	版本	修改內容

 晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE	2018.01.19	REV	00	DRAWING NO.:
UNIT : mm	Product : GFTO080CA1024768V			
SCALE : 1/1	DRAWN:	Hazel	CHECKED:	Sidney
				PAGE: 1/1