

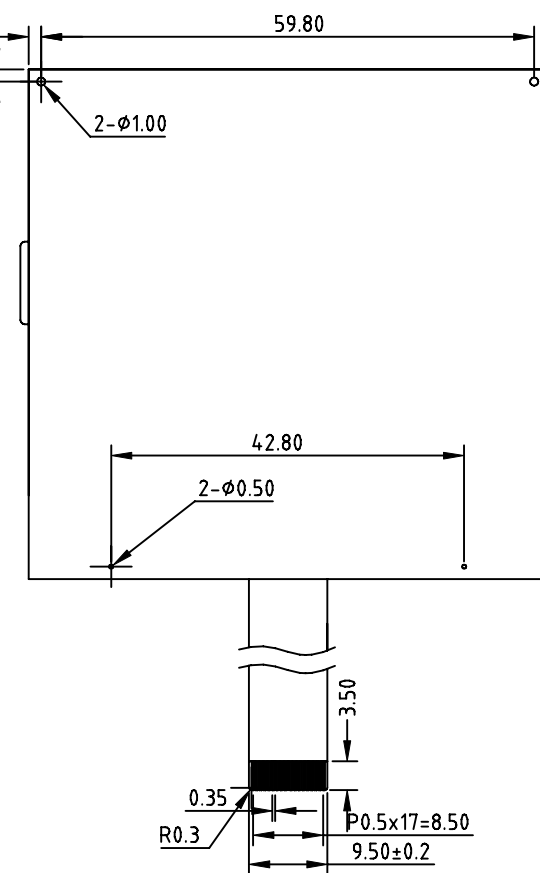
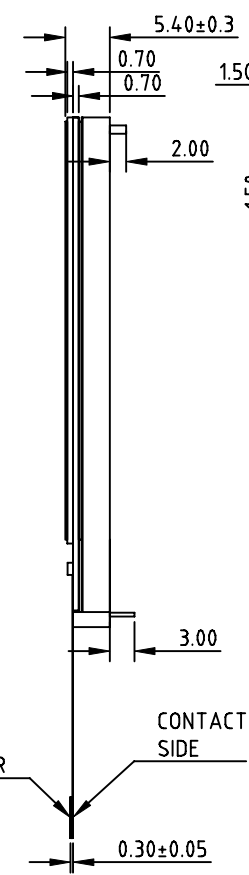


REV	Description	Date
A00	First Issue	2008-SEP-01

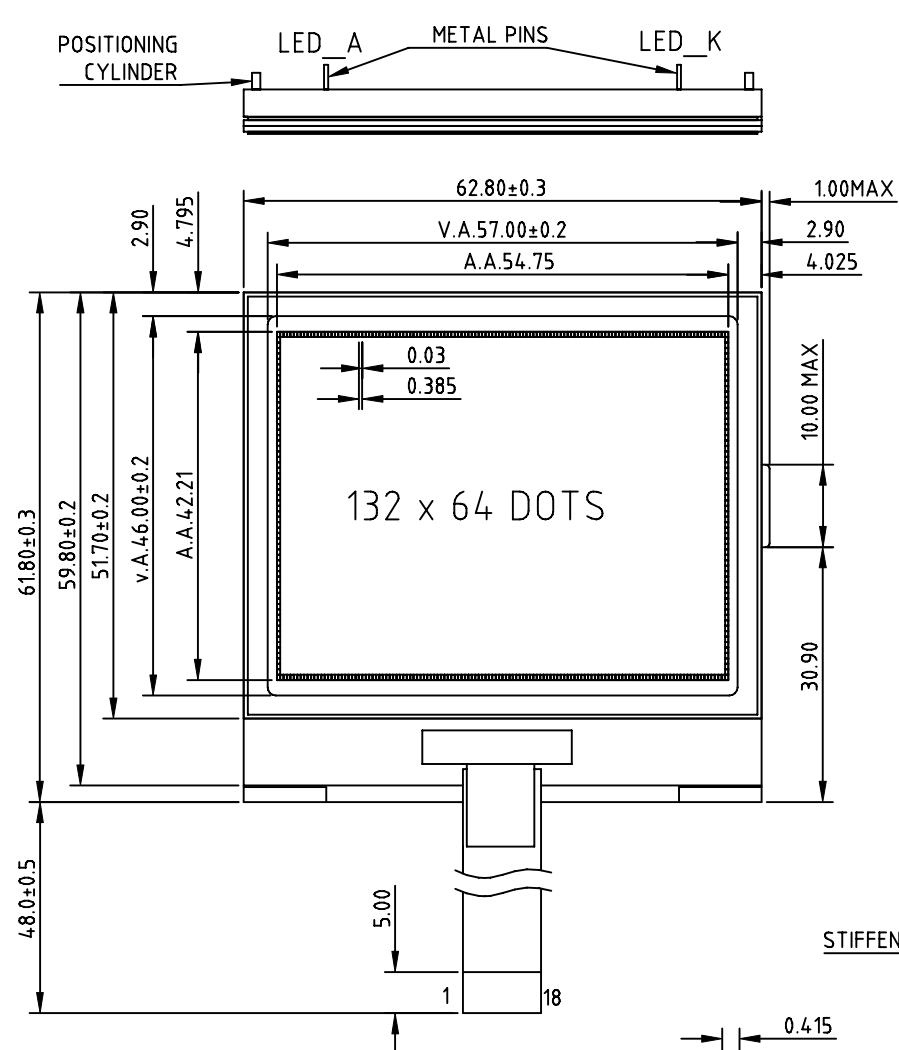

PIN ASSIGNMENT

PIN	NAME
1	V6
2	V5
3	V4
4	V3
5	V2
6	C2P
7	C2N
8	C1N
9	C1P
10	C3N
11	VEE
12	VSS
13	VDD
14	SDA
15	SCK
16	D/C
17	/CS1
18	/RES



- SPECIFICATIONS:
- 1) FSTN/+ VE/B&W/TRANSFLECTIVE MODE
 - 2) 1/65 DUTY, 1/9 BIAS, VLCD=10V
 - 3) VIEWING DIRECTION : 6 O'CLOCK
 - 4) OP. TEMP.= 0°C to +50°C
ST. TEMP.= -10°C to +60°C
 - 5) Logic Voltage: 3.0±0.3V, IC: 'SOLOMON' SD1815BZ, SERIAL I/O
 - 6) With WHITE LED Backlight, 3.3V@30mA

Description: **MECHANICAL SPECIFICATIONS**

Scale: **Sheet : 1 of 1**

Unspecified Tol. ±0.3 Unit mm

Approvals Date Project Number Item Number

Draw: TMGG13264C-06

Check:

Approve: Do Not Scale This Drawing

TRI-T COMPANY LIMITED

Projection