

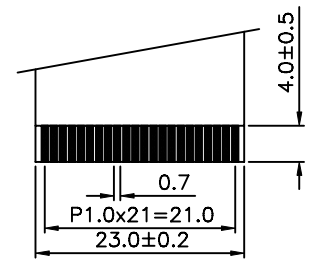
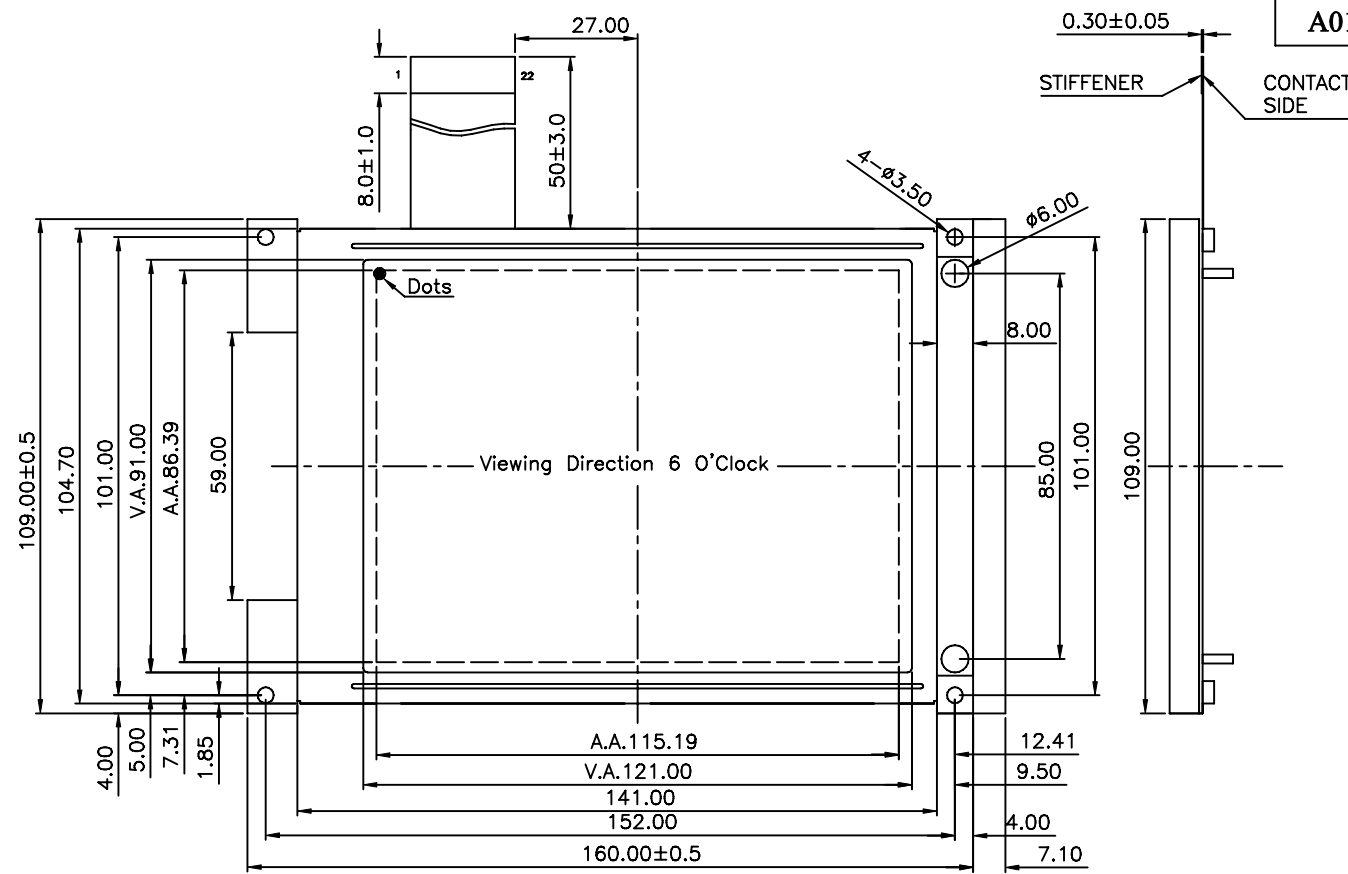


REV	Description	Date
A01	Revise Spec.	2007-MAY-23




FFC CONTACT SIDE DETAILS

- Specifications:
- 1)FSTN/+VE/B&W/Transflective Mode
 - 2)1/24.0 Duty,1/16 Bias, Vop=23V
 - 3) Viewing Angle = 6 o'clock
 - 4) Op. Temp.= 0°C To +50°C
St. Temp.= -20° To +70°C
 - 5) With White LED Backlight, 3.3V@150mA
 - 6) LCD Controller =S1D13700 VCC=5V, 80 I/O.
LCD Driver =ST8016 & ST8024
 - 7) RoHS Compliance

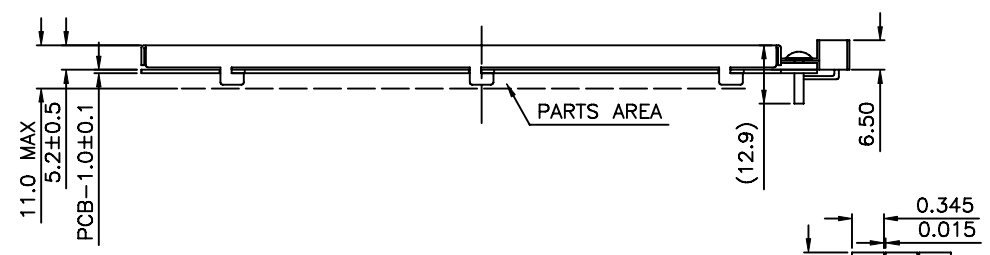

PIN ASSIGNMENT:

PIN#:	1	2	3	4	5	6	7	8	9	10	11	12	13	14
NAME:	GND	+5V	VLCD	A0	/WR	/RD	/CS	/RES	GND	DB0	DB1	GND	DB2	DB3
PIN#:	15	16	17	18	19	20	21	22						
NAME:	GND	DB4	DB5	GND	DB6	DB7	LED+	LED-						

Description:		MECHANICAL SPECIFICATIONS	
Scale:		 TRI-T COMPANY LIMITED	
Sheet : 1 of 1			
Unspecified Tol. ±0.3	Unit mm	Project Number TMTG320240D-02	Item Number
Approvals	Date		
Draw:		Do Not Scale This Drawing	Projection
Check:			
Approve:			