


**WO1602B Character 16x2**

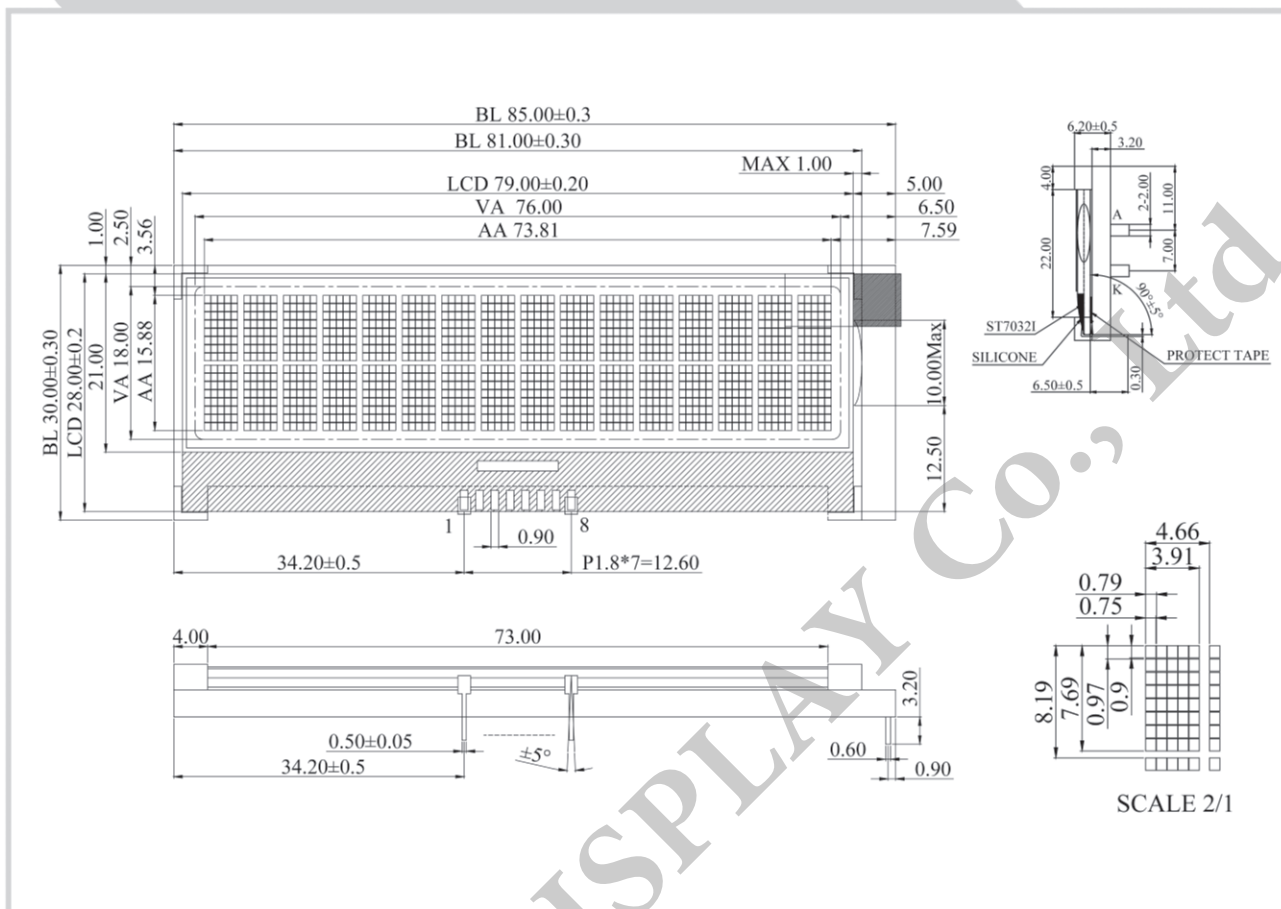

**Feature**

- 1. 1.5x8 dots includes cursor
- 2. Built-in controller ST7032
- 3. 1/16 duty, 1/5 bias
- 4. 5V power supply

Pin No.	Symbol	Description
1	Vout	Positive Voltage output
2	CAP-	DC/DC voltage converter.
3	CAP+	DC/DC voltage converter.
4	V <sub>DD</sub>	Power supply for logic
5	V <sub>SS</sub>	Ground
6	SDATA	Serial input data
7	SCLK	Serial clock input
8	RST	Controller reset signal, Active Low

**Mechanical Data**

Item	Standard Value	Unit
Module Dimension	85.0 x 30.0	mm
Viewing Area	76.0 x 18.0	mm
Dot Pitch	0.79 x 0.97	mm
Dot Size	0.75 x 0.9	mm

**Electrical Characteristics**

Item	Symbol	Standard Value	Unit
		typ.	
Input Voltage	VDD	3/5	V
Recommended LCD Driving Voltage for Normal Temp. Version module @25°C	V <sub>o</sub> -V <sub>ss</sub>	4.50	V