

SPECIFICATIONS

MECHANICAL

Mechanical Life: 1000 operation cycles per switch.

Operation Force: 500gf max.

Operation Temp: -40°C to 85°C

ELECTRICAL

Electrical Life: 1000 operation cycles per switch 24VDC,25mA

Non-Switching Rating: 100mA,50VDC

Contact Resistance: 100mΩ max.at initial.

Insulation Resistance: 100MΩ min (at 500VDC)

Dielectric Strength: 300VAC/1 minute

Capacitance: 5pf max.

HOW TO ORDER


Model No.	No. of Positions	Seal	Package Style	
   	 			
DHN	02	□: Regular	□: Tube	V=Lead Free Solderable
DHNF	04	T: Top Tape	T: Tape & Reel	
	06	Sealed		
	08			
	10			

TERMINATION / NUMBER OF POSITIONS



DHN

PROD.NO	No.of POS	DIM A
DHN -10	10	13.93[.548]
DHN - 8	8	11.39[.448]
DHN - 6	6	8.85[.348]
DHN - 4	4	6.31[.248]
DHN - 2	2	3.77[.148]

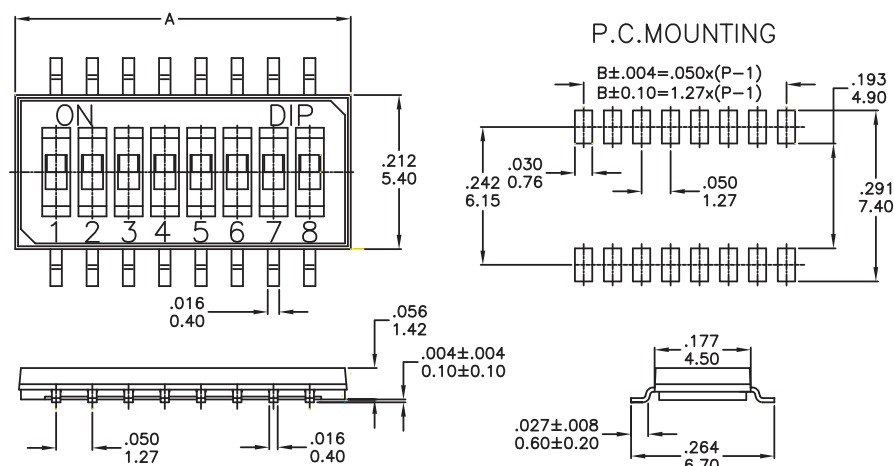

DHNF

PROD.NO	No.of POS	DIM A
DHNF -10	10	13.93[.548]
DHNF - 8	8	11.39[.448]
DHNF - 6	6	8.85[.348]
DHNF - 4	4	6.31[.248]
DHNF - 2	2	3.77[.148]

