

X2-RC Series

Rocker Switches

HOW TO ORDER


ORDERING PROCEDURE (PART II): ILLUMINATED

X2-RC 9 5 K K D E T L L R B

SERIES	SWITCH FUNCTION	RATING	HOUSING COLOR	ACTUATOR COLOR	COLOR OF WINDOW	MARKING	TERMINAL	LAMP VOLTAGE	SHAPE OF WINDOW	COLOR OF LAMP	SAFETY APPROVAL
9	ON-OFF (LIGHTED)		K (BLACK)			SEE OPTION OF MARKING (See Page 231)					
2	6A 250VAC		W (WHITE)				L	ELLIPSE (FOR LED LAMP)			B
	10A 250VAC		G (GRAY)				C	ROUND (FOR NEON OR TUNGSTEN LAMP)			UL, VDE
5	15A 125VAC		O (ORANGE)				E	NO WINDOW (FOR NEON OR TUNGSTEN LAMP)			
	10(4)A 250VAC		R (RED)				1	NEON LAMP (125VAC)			N
			N (GREEN)				2	NEON LAMP (250VAC)			F
			Y (YELLOW)				3	12VDC TUNGSTEN LAMP			B
			B (BLUE)				4	24VDC TUNGSTEN LAMP			T
			V (VIOLET)				L	LED			R
			D (RED) illu.								M
			M (GREEN) illu.								Y
			Y (YELLOW) illu.								
			F (BLUE) illu.								
							T	QUICK CONNECT TERMINAL, 4.8mm WIDE, 0.8mm THICK			

○ AVAILABLE

DIMENSION / PANEL CUT OUT

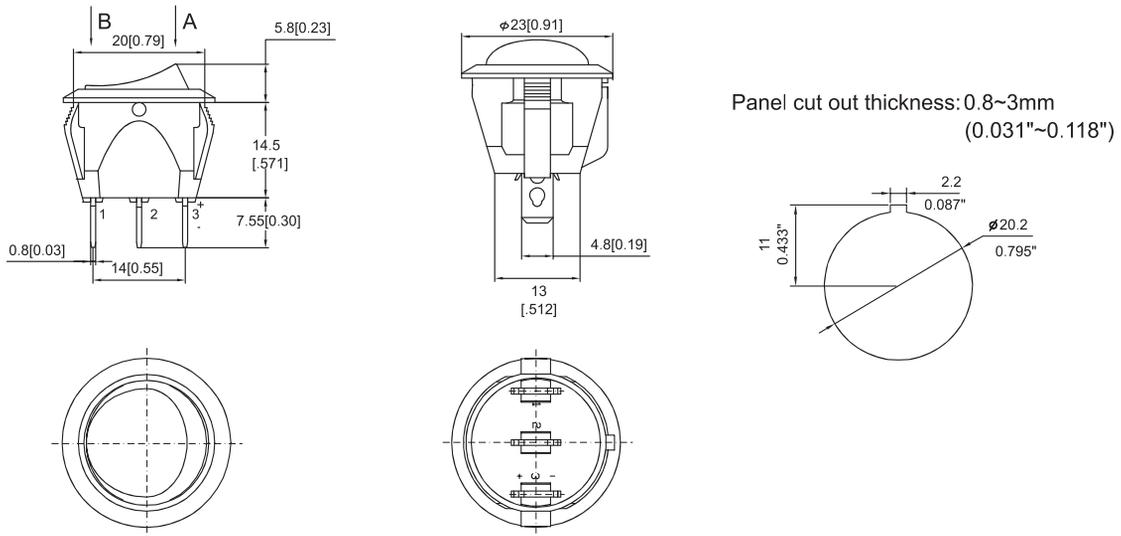

OPTIONS OF SWITCH FUNCTION / LAMP CIRCUIT

Item No	POLES & THROWS	Rocker position ():Momentary		
		Left	Center	Right
X2-RC1	SPST	ON	None	OFF
X2-RC2	SPDT	ON	None	ON
X2-RC3	SPDT	ON	OFF	ON
X2-RC9	SPST (With LED)	ON	None	OFF

