


WG320240BX/BP2/BP3 Graphic 320x240 dots

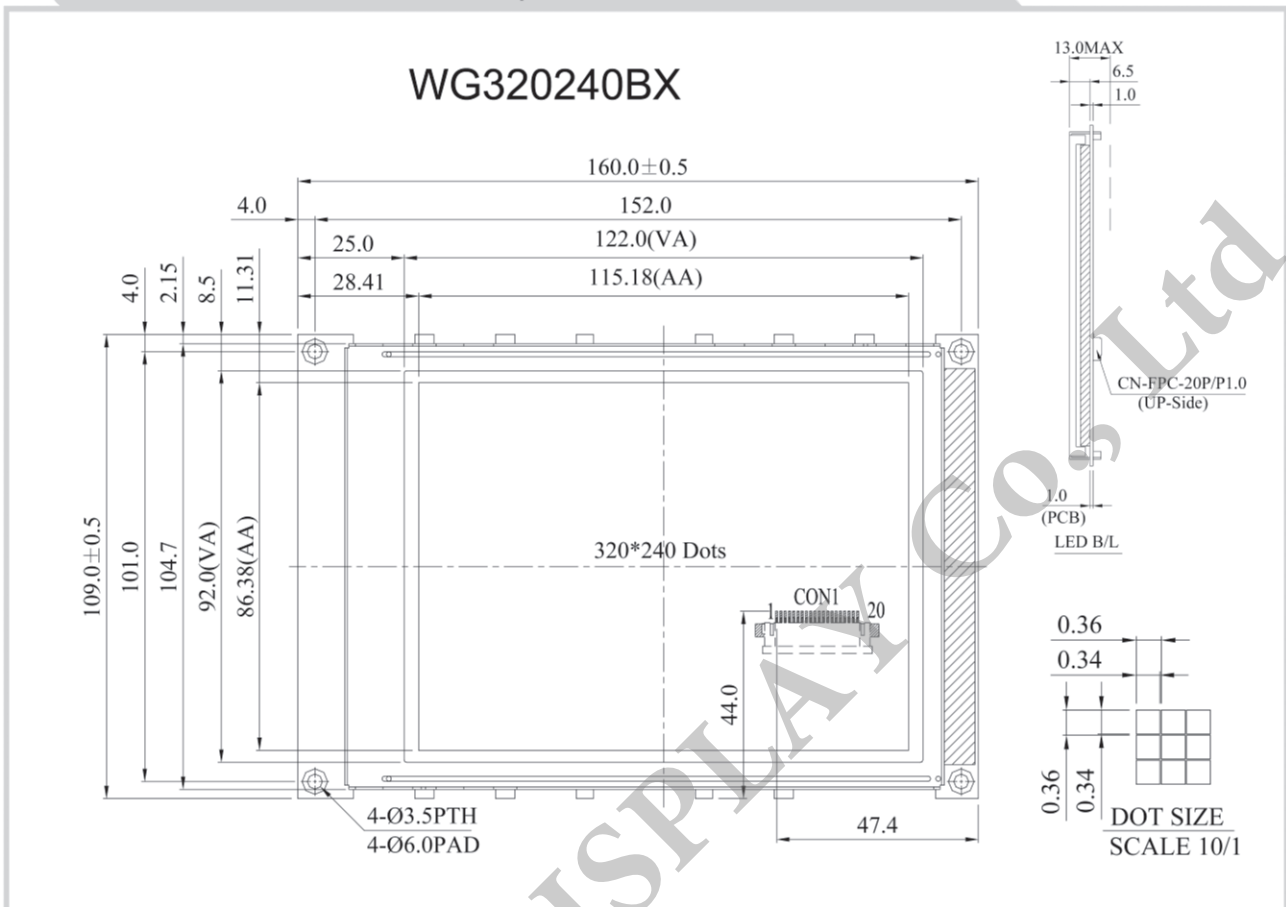

**Feature**

1. Built-in controller S1D13700
2. Built-in Negative voltage generator
3. 1/240 duty cycle
4. Touch screen option (analog type)
5. Temperature compensation option
6. WG320240BX: ZIP Connector (CN-FPC), 20 pins
7. WG320240BP2: DIP Connection, 20 pins
8. WG320240BP3: with touch panel driver, 26 pins

Pin No.	Symbol	Description
1	V <sub>SS</sub>	Ground
2	V <sub>DD</sub>	Power supply for logic
3	V <sub>O</sub>	Contrast Adjustment
4	A0	Data/ Instruction select signal
5	/WR	Data write. Write data into LCD Controller
6	/RD	Data read. Read data from LCD Controller
7~14	DB0~DB7	Data bus line
15	CS	Chip select input pins
16	RES	Controller reset signal, Active Low
17	V <sub>EE</sub>	Negative Voltage Output
18	SEL	Interface selection 6800/8080
19	FG	Frame ground
20	WAIT	Check Busy

**Mechanical Data**

Item	Standard Value	Unit
Module Dimension	160.0 x 109.0	mm
Viewing Area	122.0 x 92.0	mm
Mounting Hole	152.0 x 101.0	mm
Dot Pitch	0.36 x 0.36	mm
Dot Size	0.34 x 0.34	mm

**Electrical Characteristics**

Item	Symbol	Standard Value	Unit
		typ.	
Input Voltage	VDD	5.0	V
Recommended LCD Driving Voltage for Normal Temp. Version module @25°C	VDD-VO	23.6	V