

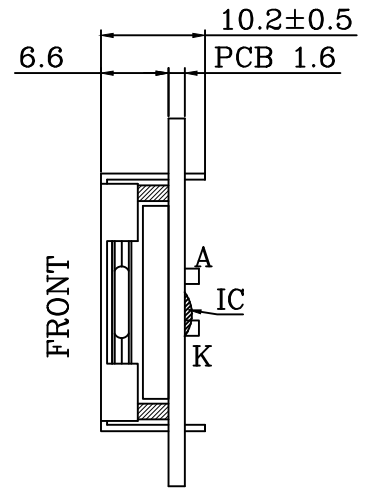


**RoHS**

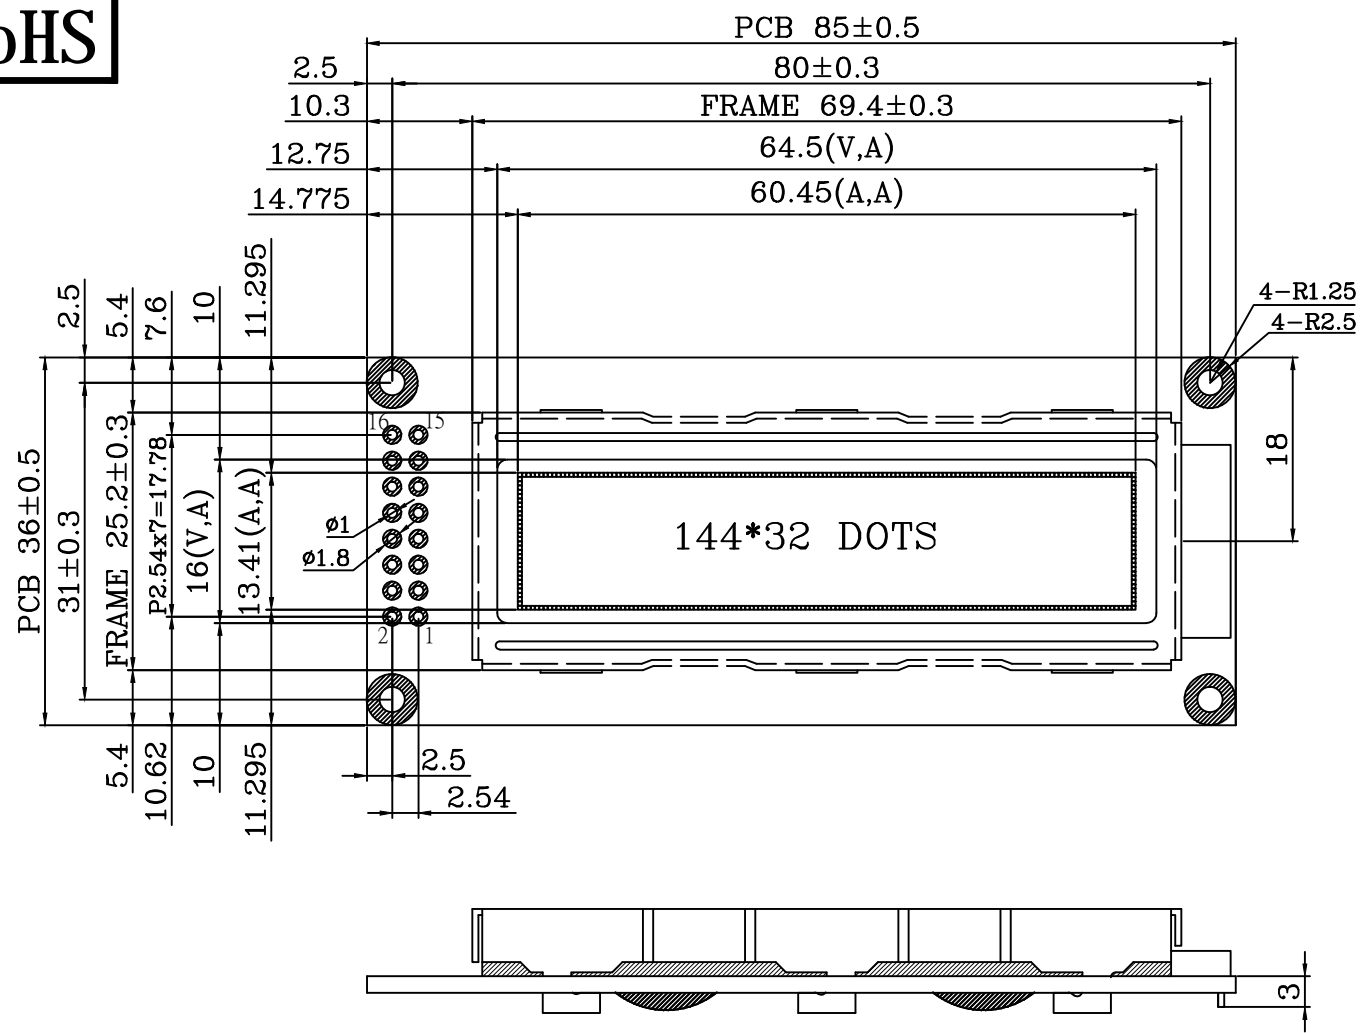


DTOS SIZE

PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

- NOTES:
- |   |                                       |
|---|---------------------------------------|
| 1. DRIVE METHOD: 1/33DUTY, 1/6BIAS, VOP 4.2V,VDD3.3V. | 6. CONNECTION: ZEBRA.                 |
| 2. VIEWING ANGLE: 12 O'CLOCK.                         | 7. CONTROLLER IC:ST7920-0C ,ST7921.   |
| 3. DISPLAY TYPE:STN(BLUE),TRANSMISSIVE/NEGATIVE.      | 8. BACK LIGHT: WHITE                  |
| 4. OPERATING TEMP: -20 TO 70°C.                       | 9. DC DC.                             |
| 5. STORAGE TEMP: -30 TO 80°C.                         | 10. NOT DIMENSION TOLERANCES IS ±0.3. |

日期	版本	修改内容
20170331	01	修改公司抬頭為"晶發科技股份有限公司"



**晶發科技股份有限公司**  
GI FAR TECHNOLOGY CO., LTD

DATE	2017.03.31	REV	01
UNIT : mm	Product :	GFE144032I-BNFF3D01	
SCALE : 1/1	DRAWN :		
SHEET : 1/1	DRAWN :	<b>Hazel</b>	CHECKED : <b>Donlin</b> PAGE : 1/1