
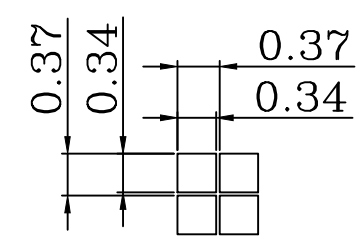
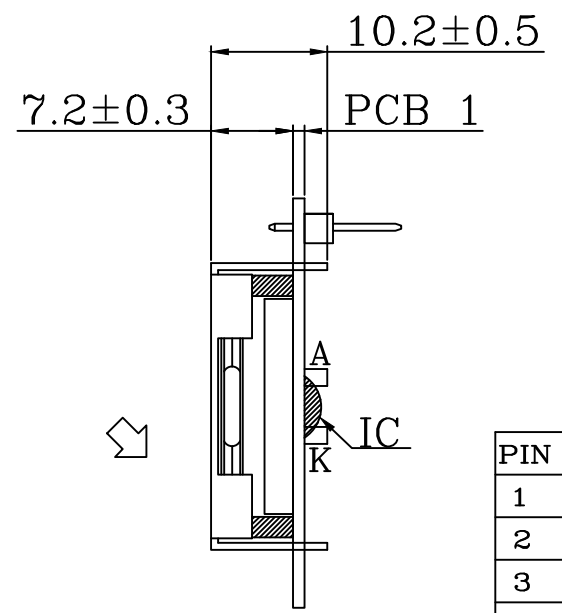


RoHS

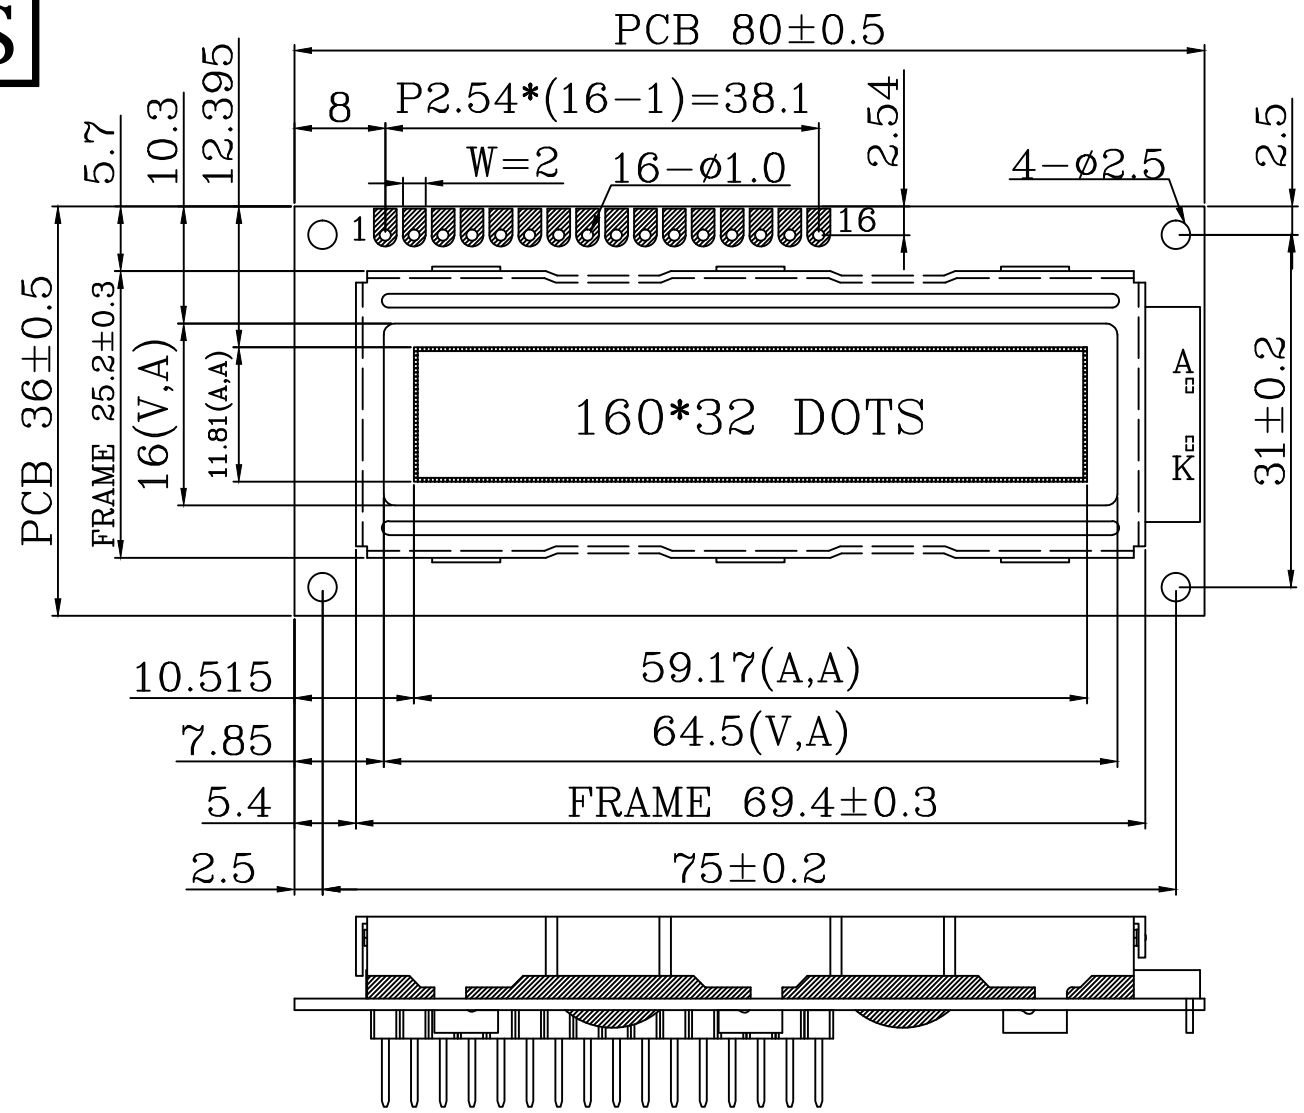


DOTS SIZE

PIN	NAME
1	VSS
2	VDD
3	VO
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A(+5V)
16	K(-)

NOTES:

- 1. DRIVE METHOD: 1/32DUTY, 1/5BIAS, VOP4.6V, VDD3.7V.
- 2. VIEWING ANGLE: 12 O'CLOCK.
- 3. DISPLAY TYPE:STN(BLUE),TRANSMISSIVE/NEGATIVE.
- 4. OPERATING TEMP: 0 TO 50°C.
- 5. STORAGE TEMP: -20 TO 70°C.
- 6. CONNECTION: ZEBRA.(Large panel is on top layer.)
- 7. BACKLIGHT: EDGE,WHITE.
- 8. CONTROLLER IC:ST7920-0C,ST7921.
- 9. NOT DIMENSION TOLERANCES IS ±0.3.

日期	版本	修改内容
20170331	01	修改公司抬頭為“晶發科技股份有限公司”



晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD

DATE	2017.03.31	REV	01
UNIT : mm	Product :	GFE160032B-BNFBB01	
SCALE : 1/1	DRAWN :	Hazel	CHECKED : Donlin
SHEET : 1/1			PAGE : 1/1