


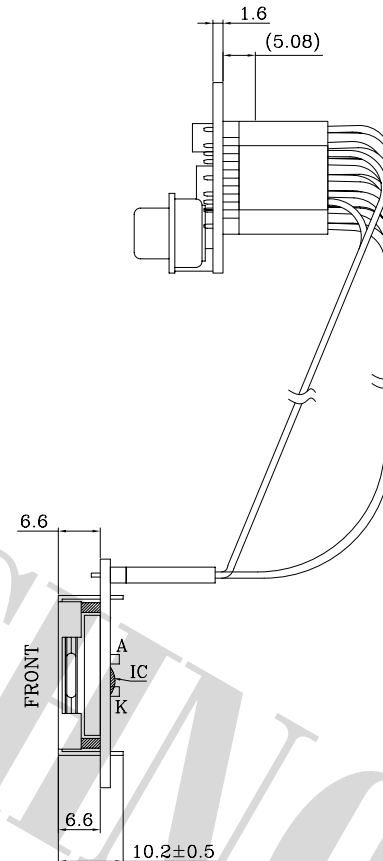
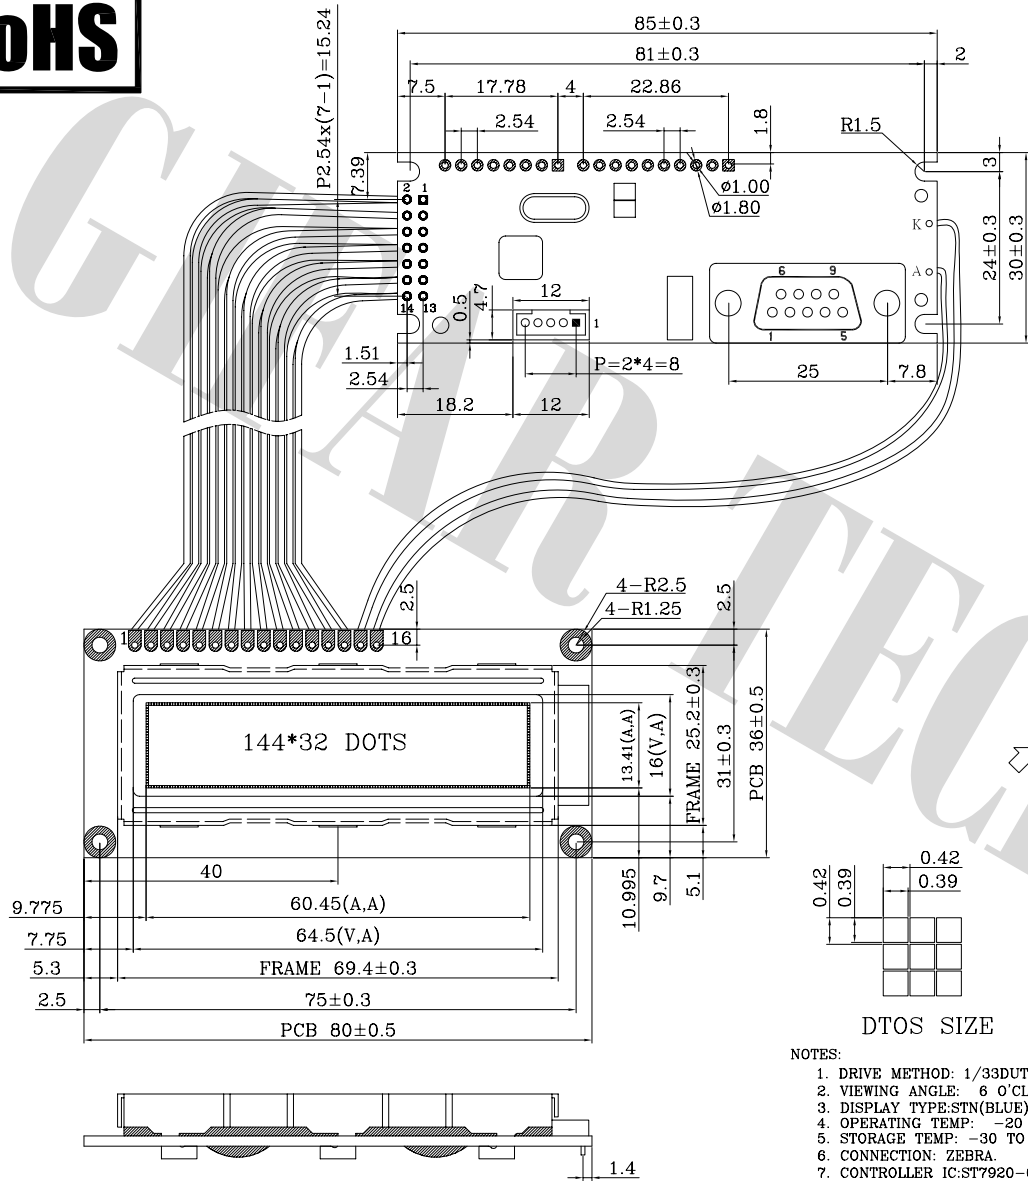


RoHS

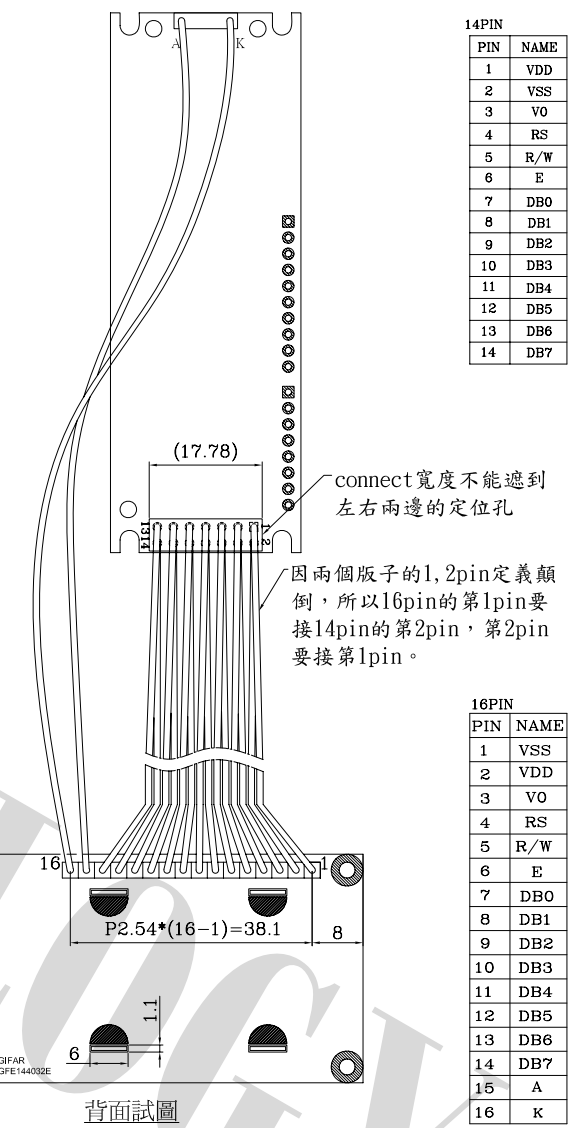


- NOTES:
1. DRIVE METHOD: 1/33DUTY, 1/6BIAS, VOP 4.2V,VDD5.0V.
 2. VIEWING ANGLE: 6 O'CLOCK.
 3. DISPLAY TYPE:STN(BLUE),TRANSMISSIVE/NEGATIVE.
 4. OPERATING TEMP: -20 TO 70°C.
 5. STORAGE TEMP: -30 TO 80°C.
 6. CONNECTION: ZEBRA.
 7. CONTROLLER IC:ST7920-0A ,ST7921.
 8. BACK LIGHT:WHITE,(EDGE 3.2V,40mA.)
 9. INTERFACE: RS232.
 10. NOT DIMENSION TOLERANCES IS ±0.3.

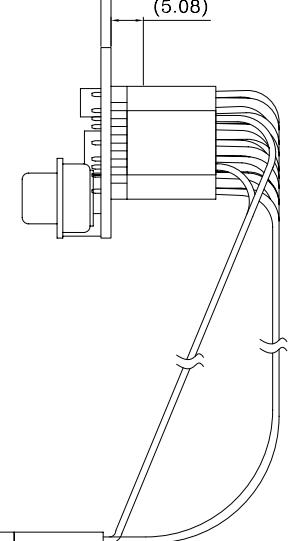

PIN	NAME
1	VDD
2	VSS
3	VO
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7

PIN	NAME
1	VSS
2	VDD
3	VO
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

日期	版本	修改內容



晶發科技有限公司
GI FAR TECHNOLOGY CO., LTD

DATE	2014.04.09	REV	0X
UNIT : mm	Product :	GFR144032A-BNFE-02	
SCALE : 1/1	DRAWN :		
SHEET : 1/1	Hazel		
CHECKED :	Donlin	PAGE :	1/1