
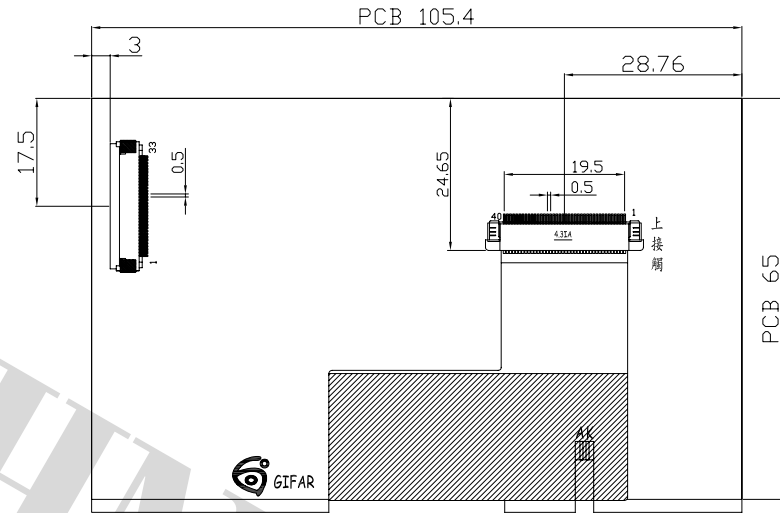
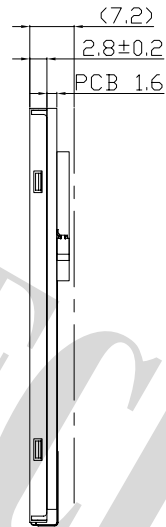


RoHS

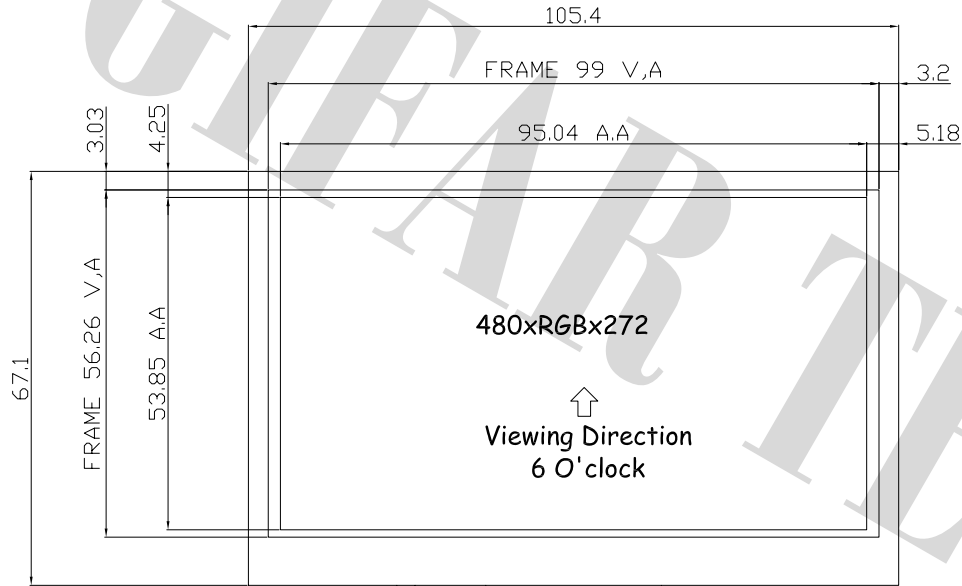


PIN DESCRIPTION


NO.	NAME
1	GND
2	VDD
3	WR
4	RD
5	CS
6	NC
7	/RESET
8	RS
9	DB15
10	DB14
11	DB13
12	DB12
13	DB11
14	DB10
15	DB9
16	DB8
17	DB7
18	DB6
19	DB5
20	DB4
21	DB3
22	DB2
23	DB1
24	DB0
25	IF
26	NC
27	NC
28	NC
29	NC
30	LEDK
31	LEDK
32	LEDA
33	LEDA

NOTES:

1. DISPLAY TYPE: 262K TFT-LCD, TRANSMISSIVE, NORMALLY
2. OPERATING TEMP: -20~70°C
3. STORAGE TEMP: -30~80°C
4. GENERAL TOLERANCE : ±0.2
5. BACKLIGHT: 12 CHIP-WHITE LEDS SERIES
6. WHITE BACKLIGHT: VF=18.2V, IF=40mA/LED
7. BRIGHTNESS: TYP 900 nits

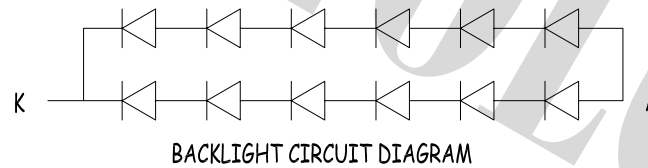

日期	版本	修改内容


晶發科技 有限公司
 GI FAR TECHNOLOGY CO., LTD

DATE	2012.04.24	REV	X0
UNIT : mm	Product :	GFTM043IA480272-S	
SCALE : 1/1	DRAWN :	Hazel	CHECKED : Donlin
SHEET : 1/1			PAGE: 1/1