


NO.	PIN TYPE
1	GND
2	GND
3	VDD
4	VDDI
5	NC
6	RESX
7	DCX
8	CSX
9	RDX
10	WRD
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	GND
20	LEDA
21	LEDK

**Specification**

1.Display mode: TFT /Normally white/Transmissive
2.Viewing Direction: 6 O'clock 3.Display Resolution: DOTS:128*(RGB)*160
4.Logic voltage: 2.8V
5.Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
6.IC NO. : ST7735S-G4 7.BACKLIGHT: Vf=6.0V,If=15mA
8.Unspecified tolerance : ±0.30mm
9.Remark: RoHS
10.LCD NO: XXXXXX

NOTE:

1. 噴碼YYMMDD代表量產年月日

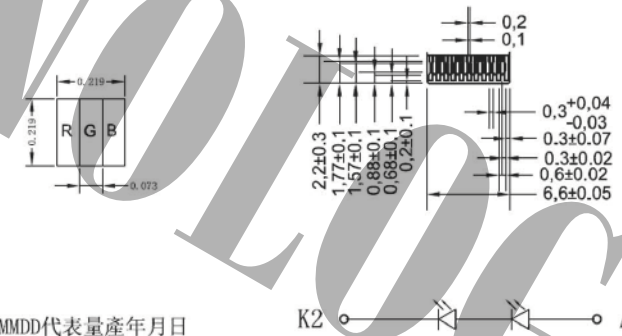

日期	版本	修改內容
171201	00	MD圖面

 <b>晶發科技股份有限公司</b> GI FAR TECHNOLOGY CO., LTD.				
DATE	2017.12.13	REV	00	DRAWING NO.:
UNIT : mm	Product : GFTO0177DA128160			
SCALE : 1/1	DRAWN: Hazel	CHECKED:	Sidney	PAGE: 1/1