
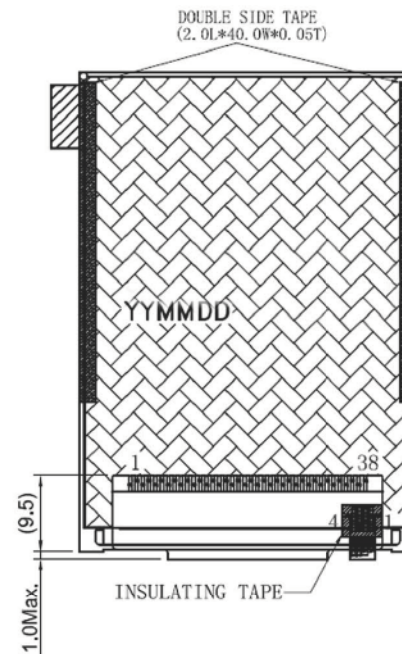
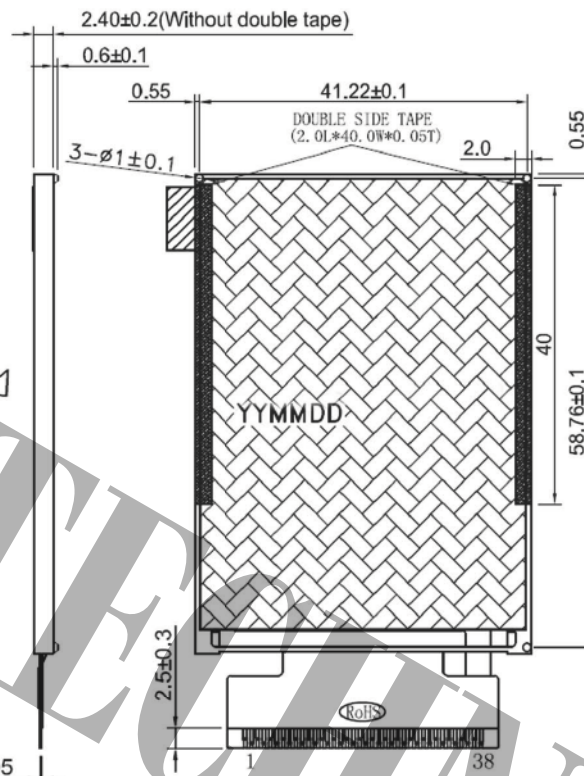



RoHS

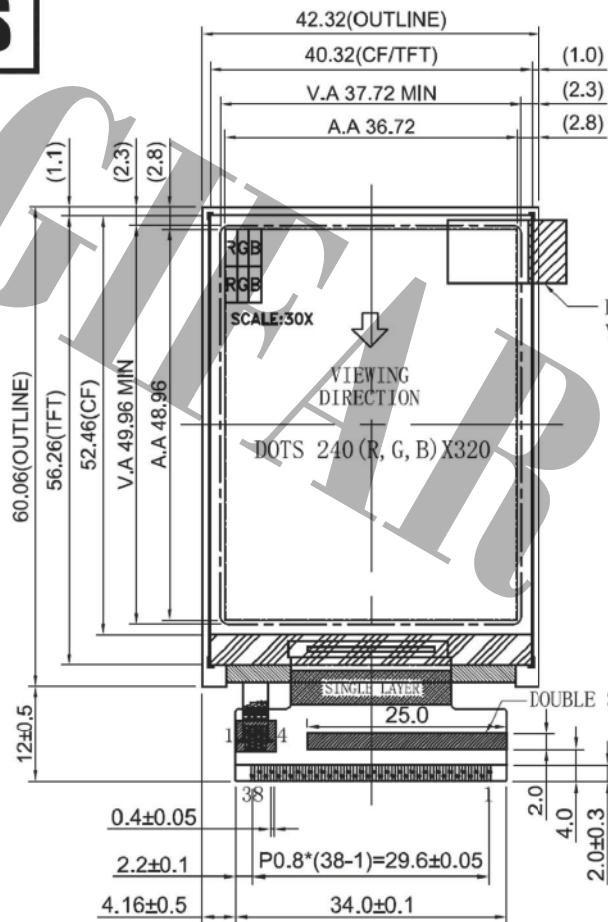

PIN NO.	DEFINE
1	GND
2	RESET
3	DB7
4	DB6
5	DB5
6	DB4
7	DB3
8	DB2
9	DB1
10	DB0
11	RD
12	WR
13	RS
14	CS
15	VDD_C1
16	VCOMH_C2
17	VCOML_C3
18	GVDD_C4
19	VCL_C5
20	AVDD_C6
21	VCI_C7
22	C12N
23	C12P
24	C11N
25	C11P
26	VGL_C10_D1
27	VGL_C11
28	C21N
29	C21P
30	C22N
31	C22P
32	C31N
33	C31P
34	LEDA
35	LEDK1
36	LEDK2
37	LEDK3
38	VDD

Specification

1.Display mode: a-SI TFT / Normally White TN / TRANSMISSIVE
2.Viewing Direction: 12 O'clock
3.Power supply voltage: Vdd=2.8V
4.Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
5.DRIVER IC. :ILI9341 6.INTERFACE : 8 Bit Interface for i80system
7.BACKLIGHT: VF=3.2V IF=60mA 3 White LED
8.Unspecified tolerance : ±0.30mm
9.Remark: RoHS



NOTE:

1. 喷码YYMMDD代表量產年月日

日期 版本 修改內容




晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE 2017.12.22 REV 00 DRAWING NO.:

UNIT : mm
SCALE : 1/1

Product : GFTO024GA240320

DRAWN: Hazel CHECKED: Sidney



PAGE: 1/1