
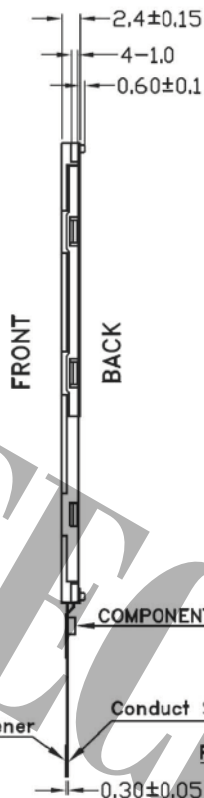


RoHS

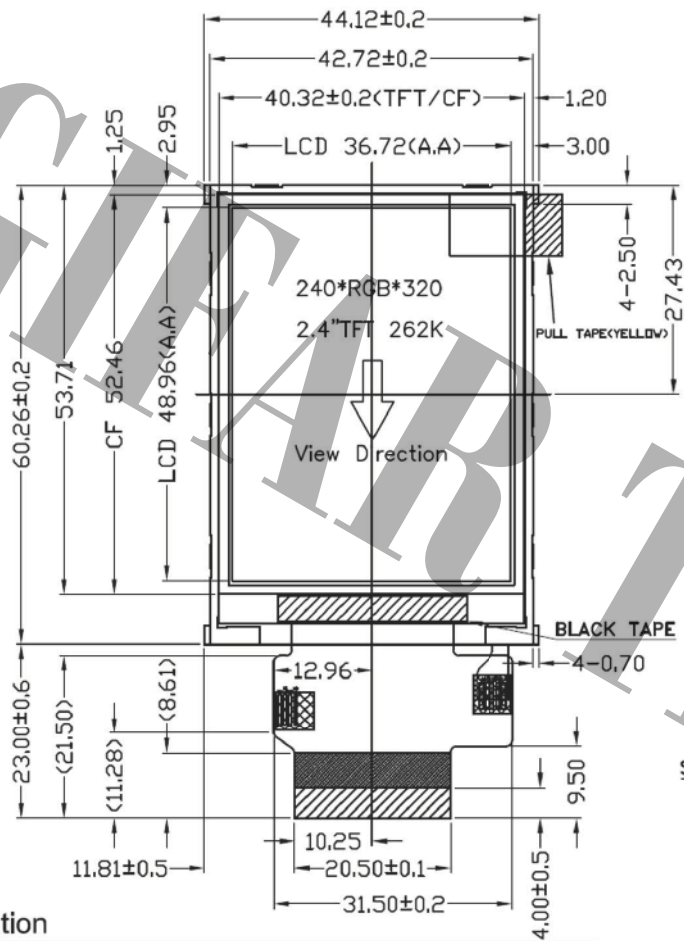


1	LED-K	21	DB12
2	LED-A	22	DB11
3	GND	23	DB10
4	VCI	24	DB09
5	RESET	25	DB08
6	RS_SCL	26	DB07
7	/RD	27	DB06
8	/CS	28	DB05
9	SDA	29	DB04
10	WR_D/C	30	DB03
11	VSYNC	31	DB02
12	HSYNC	32	DB01
13	DOTCLK	33	DB00
14	DE	34	TE
15	GND	35	GND
16	DB17	36	IOVCC
17	DB16	37	NC(XR)
18	DB15	38	NC(YD)
19	DB14	39	NC(XL)
20	DB13	40	NC(YU)

Specification

1. Display mode: TFT /Normally white/Transmissive
2. Viewing Direction: 12 O'clock 3. Display Resolution: DOTS:240*(RGB)*320
4. Logic voltage: 2.8V
5. Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
6. IC NO.: ILI9341V 7. BACKLIGHT: Vf=2.9~3.3V IF=60mA
8. Unspecified tolerance : ±0.30mm
9. Remark: RoHS
10. LCD NO: TBD

NOTE:
 1.(.):REFERENCE DIMENSION.
 2.□:IMPORTANT DIMENSION.
 3. 喷码YYMMDD代表量產年月日



日期 版本 修改内容

晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE 2017.12.15 REV 00 DRAWING NO.:

UNIT : mm
SCALE : 1 / 1

Product : GFTO024JA240320

DRAWN: Hazel CHECKED: Sidney

PAGE: 1 / 1