


RoHS

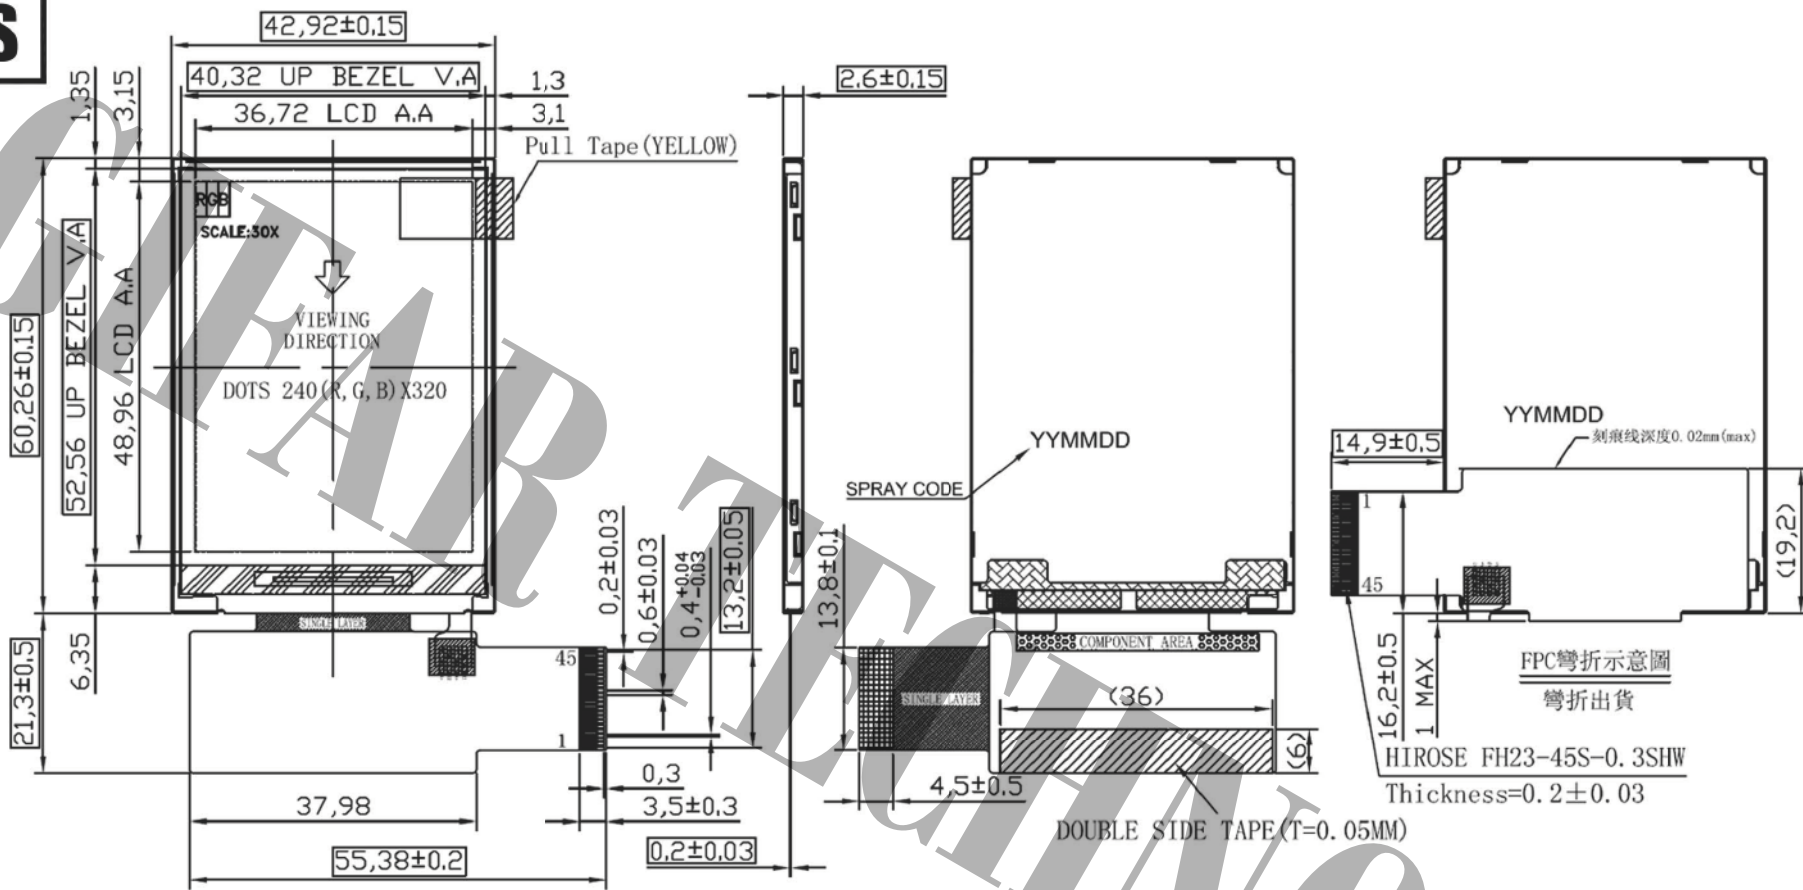


PIN NO.	DEFINE
1	VCI
2	IOVCC
3	IM0
4	IM1
5	IM2
6	IM3
7	RESET
8	VSYNC
9	HSYNC
10	DOTCLK
11	ENABLE
12	DB17
13	DB16
14	DB15
15	DB14
16	DB13
17	DB12
18	DB11
19	DB10
20	DB9
21	DB8
22	DB7
23	DB6
24	DB5
25	DB4
26	DB3
27	DB2
28	DB1
29	DB0
30	SDO
31	SDI
32	RD
33	WR
34	RS/SCL
35	CS
36	GND
37	LEDA
38	LEDK1
39	LEDK2
40	DUMMY
41	DUMMY
42	DUMMY
43	DUMMY
44	DUMMY
45	DUMMY

Specification

1. Display mode: a-Si TFT / Normally White TN / TRANSMISSIVE
2. Viewing Direction: 12 O'clock
3. Power supply voltage: Vdd=2.8V
4. Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
5. DRIVER IC.: ILI9341V 6. INTERFACE: RGB CPU SPI PARALEL Interface
7. BACKLIGHT: VF=2.8-3.3V 3.0V(TYP.) IF=80mA 4 White LED
8. Unspecified tolerance : ±0.30mm
9. Remark: RoHS 10. LUMINANCE: 400 cd/m ² (MIN.)

NOTE:

- (): REFERENCE DIMENSION.
- : IMPORTANT DIMENSION.
- 喷码YYMMDD代表量产年月日

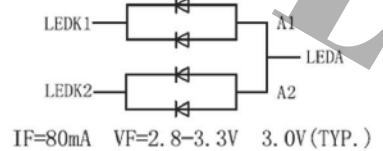

日期	版本	修改内容


晶發科技股份有限公司
 GI FAR TECHNOLOGY CO., LTD.

DATE	2017.12.18	REV	00	DRAWING NO.:
UNIT : mm	Product : GFT0024KB240320			
SCALE : 1 / 1	DRAWN: Hazel	CHECKED:	Sidney	PAGE: 1 / 1