



RoHS

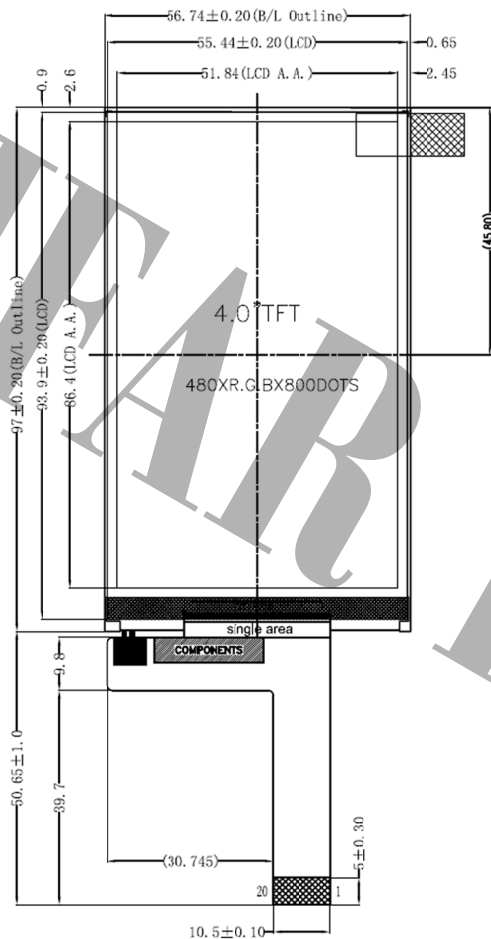


Specification

- 1.LCD type: a-Si TFT , Normally Black , IPS mode , Transmissive
- 2.Driver IC: ST7701S
- 3.View direction: Free
- 4.Operating temp:-20°C~70°C, Storage temp: -30°C~80°C
5. Luminace(cd/m²):300(Min.) 9PCS White LED, Vf:28.8V; If:20mA
6. Chromaticity Coordinales:X(w)0.27~0.33 / Y(w)0.34~0.40
- 7.The tolerance unless classified ±0.30mm
- 8.Remark:ROHS

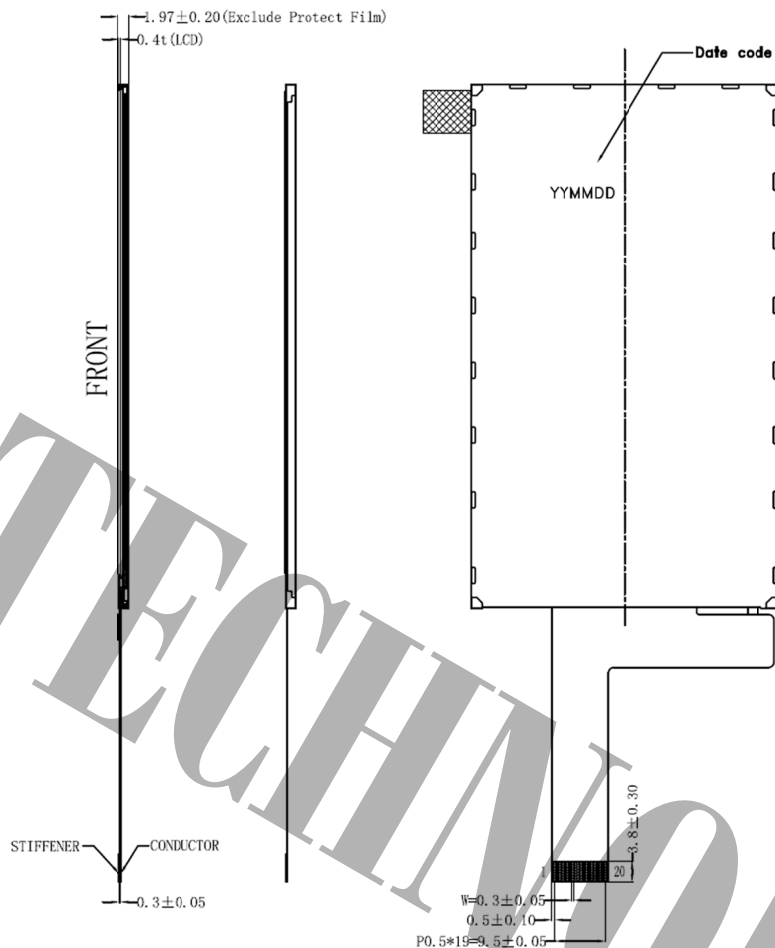

電路圖 CIRCUIT DIAGRAM (LED 1*9=9 dies)



PIN	SYMBOL
1	VDDI
2	VCI
3	RESX
4	TE
5	GND
6	D1_P
7	D1_N
8	GND
9	CLK_P
10	CLK_N
11	GND
12	D0_P
13	D0_N
14	GND
15	IM3
16	IM2
17	IM1
18	IM0
19	LED-A
20	LED-K

日期

版本

修改內容



晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE

2017.12.25

REV

00

DRAWING NO.:

UNIT : mm

SCALE : 1/1

Product : GFTO040AA480800

DRAWN:

Hazel

CHECKED:

Sidney



PAGE: 1/1