



RoHS

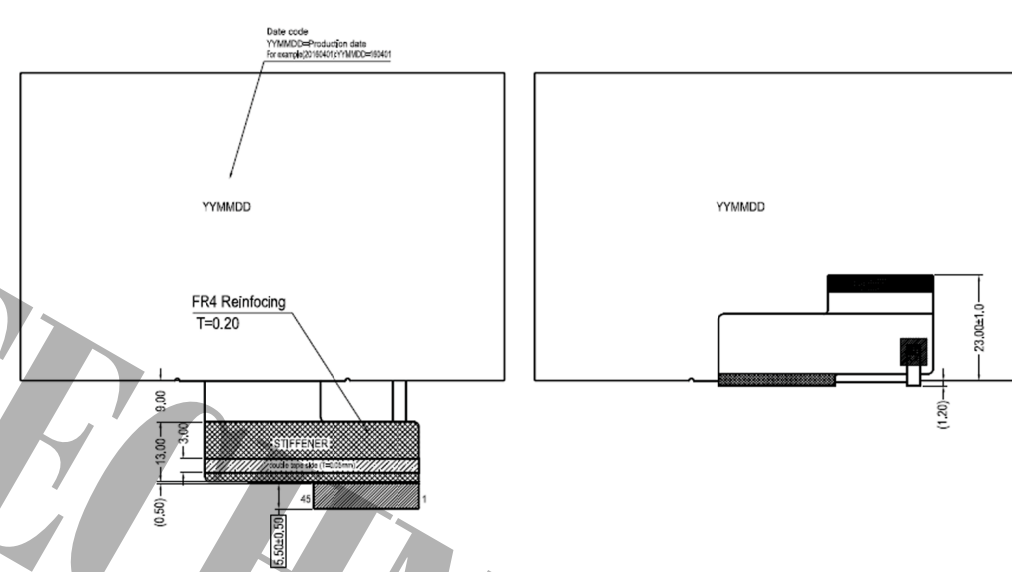

PIN FUNCTION	
PIN	Description
2	LEDK
3	LED A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSNC
34	DE
35	GND
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC

1.Display mode: 4.3" TFT,TRANSMISSIVE
2.Driver IC: ST7252 Connector: 54104-4531(Molex)
3.View direction: 12 O'CLOCK (6:00 Gray inversion)
4.Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
5.Backlight Type: 8 WHITE LEDS
6.LED: If=20.0mA/LED (CONSTANT CURRENT)
7.Unspecified tolerance : ±0.20mm
8.Remark: ROHS

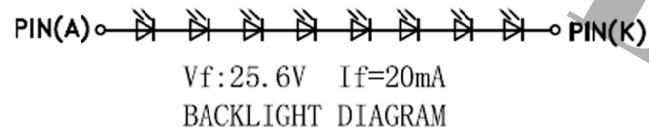

NOTE:
1.():REFERENCE DIMENSION.
2.□:IMPORTANT DIMENSION.

日期	版本	修改内容	 晶發科技股份有限公司 GI FAR TECHNOLOGY CO., LTD.						
			DATE	2017.12.25	REV	00	DRAWING NO.:		
			UNIT : mm SCALE : 1/1	Product : GFTO043KA480272					
				DRAWN:	Hazel	CHECKED:	Sidney	PAGE: 1/1	