





RoHS

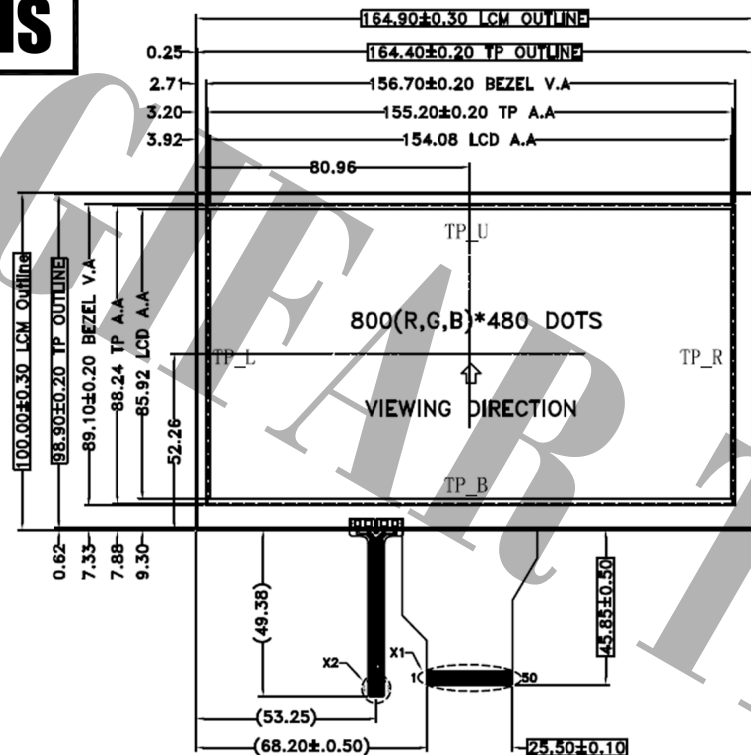

NOTE:
1.():REFERENCE DIMENSION.
2. □:IMPORTANT DIMENSION.
3.FPC connector suggest to be Hirose "FH12A-50S-0.5H" or equivalent;

Specification

- 1.LCD type: a-Si TFT , Normally White , TN mode ,Transmissive Anti-Glare
- 2.Driver IC: TBD
- 3.View direction: 6 O'Clock(for best image quality),12 O'Clock(Gray inversion)
- 4.Operating temp:-20° C~70° C, Storage temp: -30° C~80° C
5. Backlight: 27PCS White LED , Vf:9.3V; If:170~200mA
6. Chromaticity Coordinales: Wx: 0.28~0.38 / Wy: 0.33~0.43
- 7.The tolerance unless classified ±0.30mm
- 8.Remark:ROHS

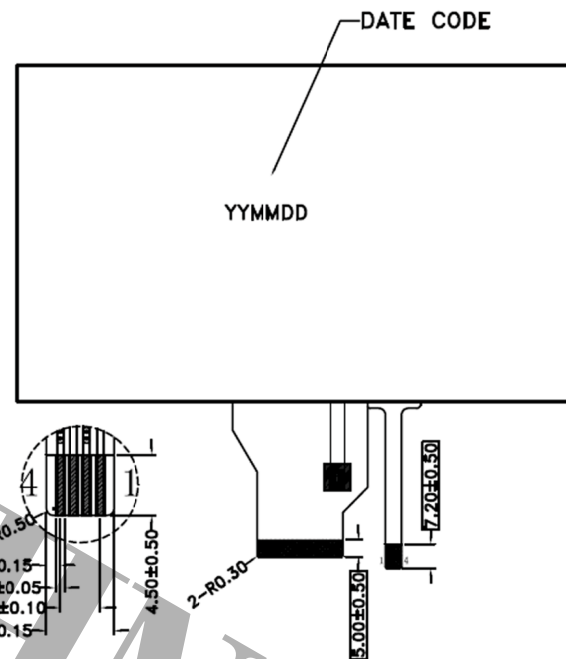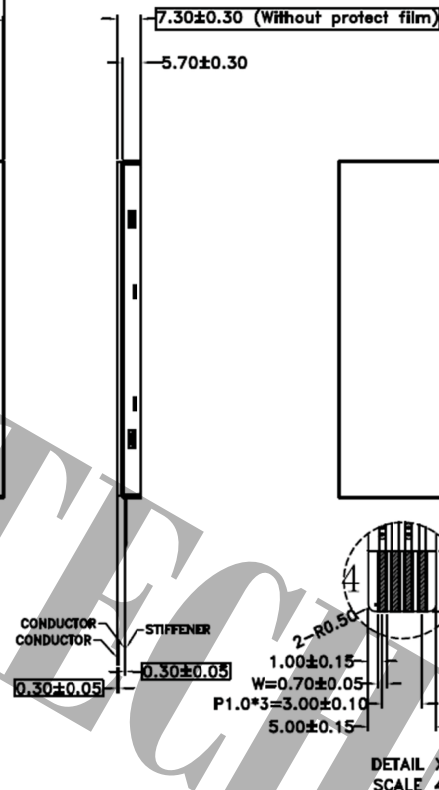


TP PIN DESCRIPTION

PIN	SYMBOL	FUNCTION
1	TP_R	RIGHT
2	TP_B	BOTTOM
3	TP_L	LEFT
4	TP_U	UPPER

PIN DESCRIPTION

PIN	SYMBOL	PIN	SYMBOL
1	V _{LED+}	26	G1
2	V _{LED+}	27	G0
3	V _{LED-}	28	R7
4	V _{LED-}	29	R6
5	GND	30	R5
6	V _{COM}	31	R4
7	DV _{DD}	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	V _{GH}
17	B2	42	V _{GL}
18	B1	43	AV _{DD}
19	B0	44	RESET
20	G7	45	NC
21	G6	46	V _{COM}
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

電路圖 CIRCUIT DIAGRAM (LED 3*9=27 dies)

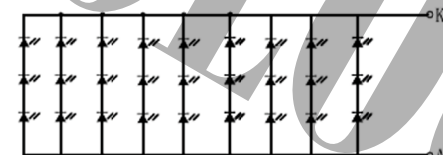

日期

版本

修改内容



晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE

2018.01.17

REV

00

DRAWING NO.:

UNIT : mm

SCALE : 1/1

Product : GFT0070WA800480YL

DRAWN:

Hazel

CHECKED:

Sidney



PAGE: 1/1