

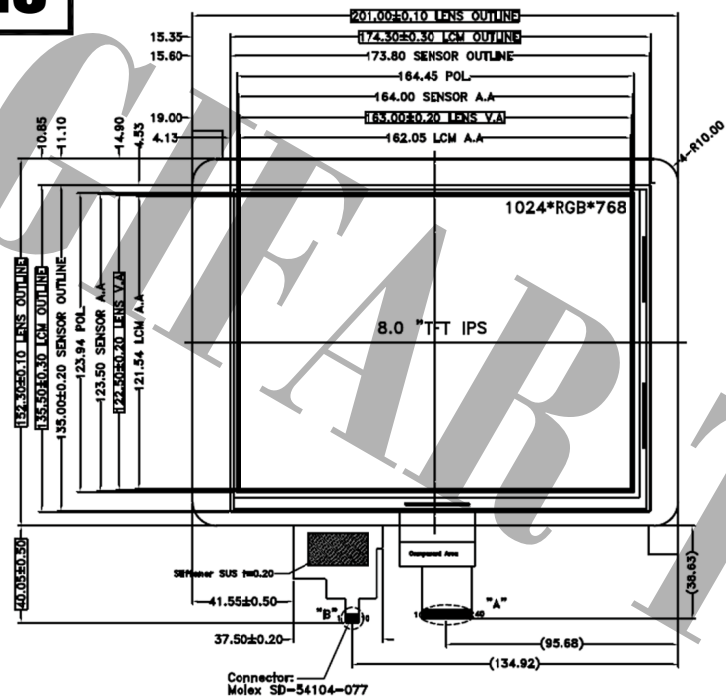



RoHS

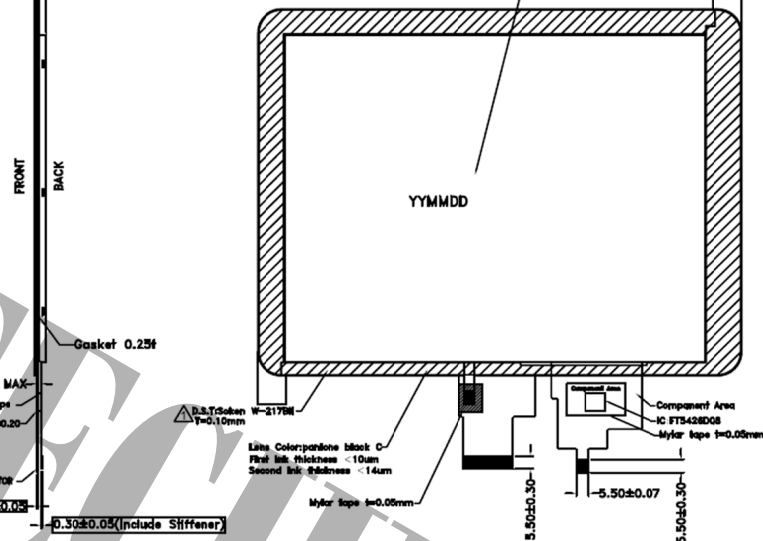


Specification

- | |
|---|
| 1.LCD type: a-Si TFT active matrix , Normally Black , IPS mode ,RGB-stripe |
| 2.Driver IC: TBD |
| 3.View direction: ALL |
| 4.Operating temp:-10°C~50°C, Storage temp: -20°C~60°C |
| 5. Backlight: 24PCS White LED , Vf:9.0-10.8V; If:160mA , With LCM Luminace(cd/m²):200(Mln.) |
| 6. Chromaticity Coordinales: Wx: 0.26~0.34 / Wy: 0.28~0.38 |
| 7.The tolerance unless classified ±0.30mm |
| 8.Remark:ROHS |



NOTE:
1.():REFERENCE DIMENSION.
2.□:IMPORTANT DIMENSION.

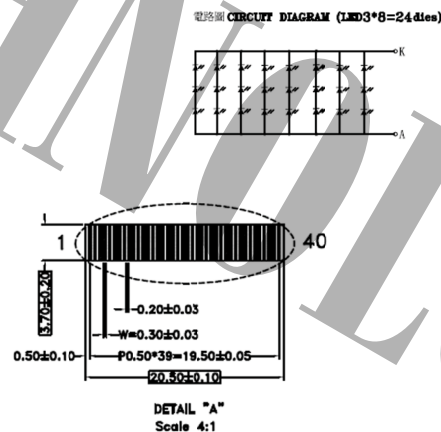

PIN DESCRIPTION

PIN	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	Reset
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+

TP PIN DESCRIPTION

PIN	FUNCTION
1	GND
2	RSE 3.3V
3	SDA 3.3V
4	SCL 3.3V
5	INT 3.3V
6	VDD 3.3V
7	GND
8	GND
9	GND
10	GND

日期	版本	修改内容	 晶發科技股份有限公司 GI FAR TECHNOLOGY CO., LTD.						
			DATE	2018.01.19	REV	00	DRAWING NO.:		
			UNIT : mm SCALE : 1/1	Product : GFTO080CA1024768ZIV					
				DRAWN:	Hazel	CHECKED:	Sidney	PAGE : 1/1	