
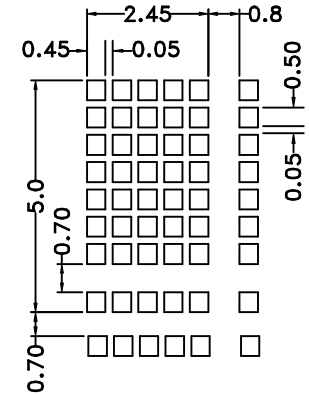
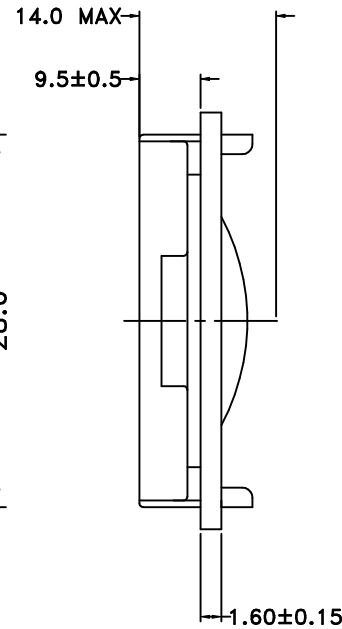




REV	Description	Date
A00	First Issue	2003-JUL-08

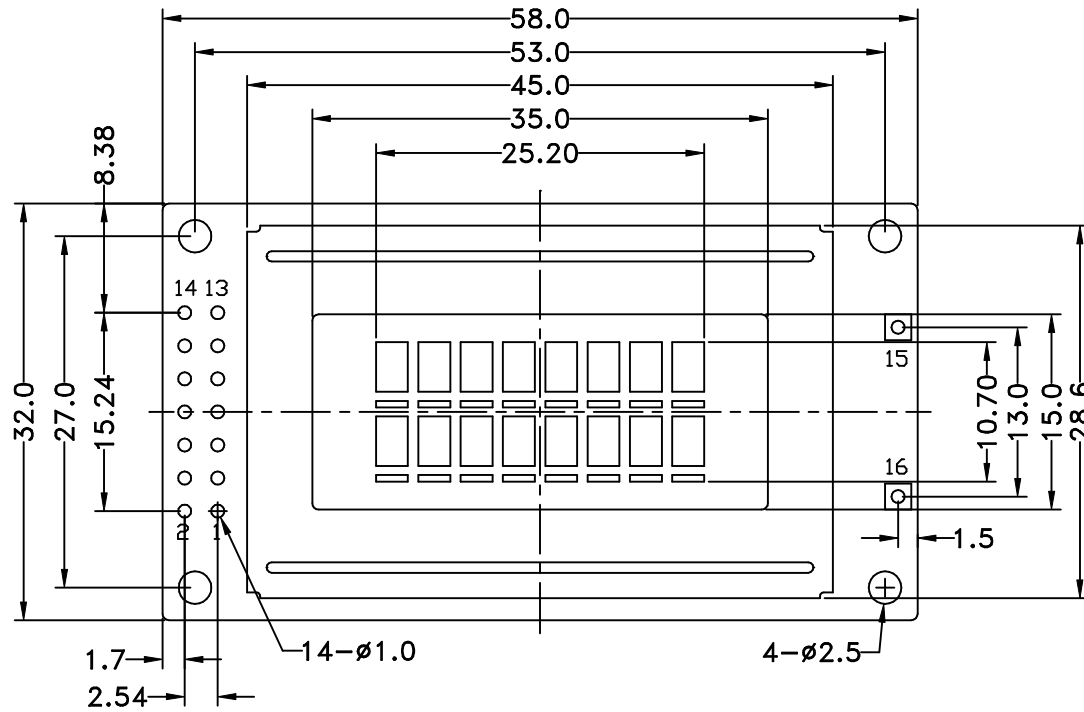

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V <sub>SS</sub>	V <sub>CC</sub>	V <sub>O</sub>	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	K	A

**SPECIFICATIONS:**

- 1)STN/+VE/Y-G/TRANSFLECTIVE
- 2)1/16 DUTY, 1/5 BIAS, VOP=5.0V
- 3)VIEWING ANGLE=6 O'CLOCK
- 4)OP.TEMP.=0°C TO +50°C  
ST.TEMP.=−10°C TO +60°C
- 5)WITH Y-G LED BACKLIGHT, 4.05V@60mA

Description: <b>MECHANICAL SPECIFICATIONS</b>	
Scale:	 <b>TRI-T COMPANY LIMITED</b>
Sheet : 1 of 1	
Unspecified Tol. ±0.3	Unit mm
Approvals	Date
Draw:	Project Number
Check:	TMBC08265ASP-02
Approve:	Do Not Scale This Drawing
Item Number	 Projection