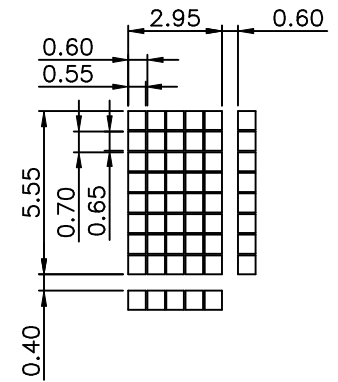
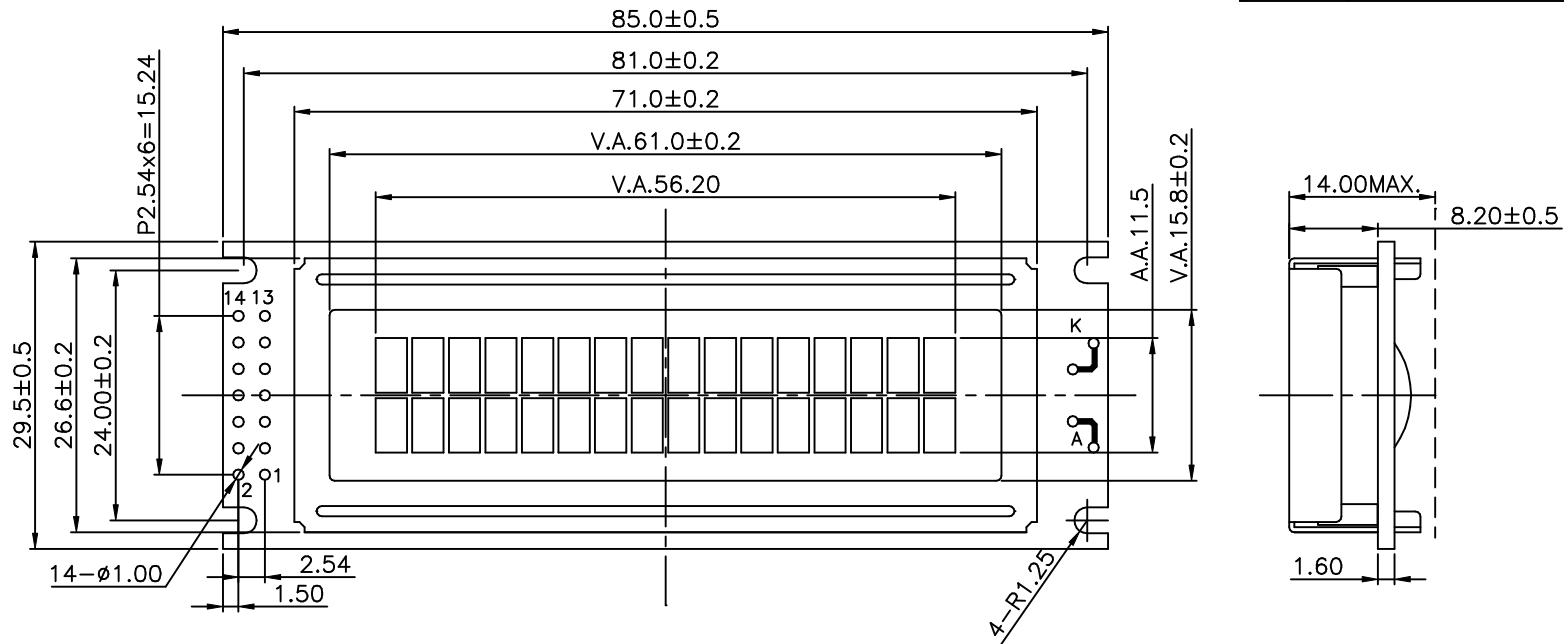


REV	Description	Date
A00	First Issue	2004-MAY-22





PIN ASSIGNMENT:

PIN#	1	2	3	4	5	6	7	8	9	10	11	12	13	14	A	K
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED(+)	LED(-)

### Specifications :

- 1) STN/+VE/Y-G/TRANSFLECTIVE MODE
- 2) 1/16 DUTY, 1/5 BIAS,  $V_{op}=4.5V$
- 3) VIEWING ANGLE: 6 O' CLOCK
- 4) OP. TEMP. =  $0^{\circ}C$  TO  $+50^{\circ}C$   
ST. TEMP. =  $-10^{\circ}C$  TO  $+60^{\circ}C$
- 5) WITH Y-G -LED BACKLIGHT ,  $4.05V@90mA$

Description:		MECHANICAL SPECIFICATIONS	
Scale:		 <b>TRI-T COMPANY LIMITED</b>	
Sheet : 1 of 1			
Unspecified Tol. $\pm 0.3$	Unit mm	Project Number	Item Number
Approvals	Date	TMBC16265KSP-01	
Draw:		Do Not Scale This Drawing	
Check:			
Approve:			
			 <b>Projection</b>