
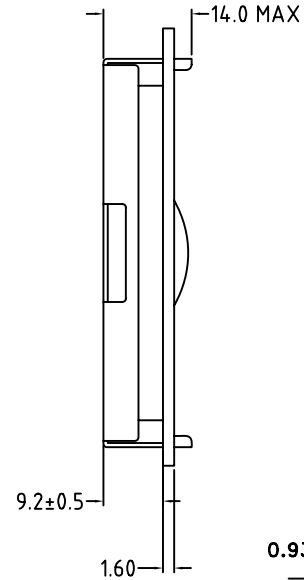
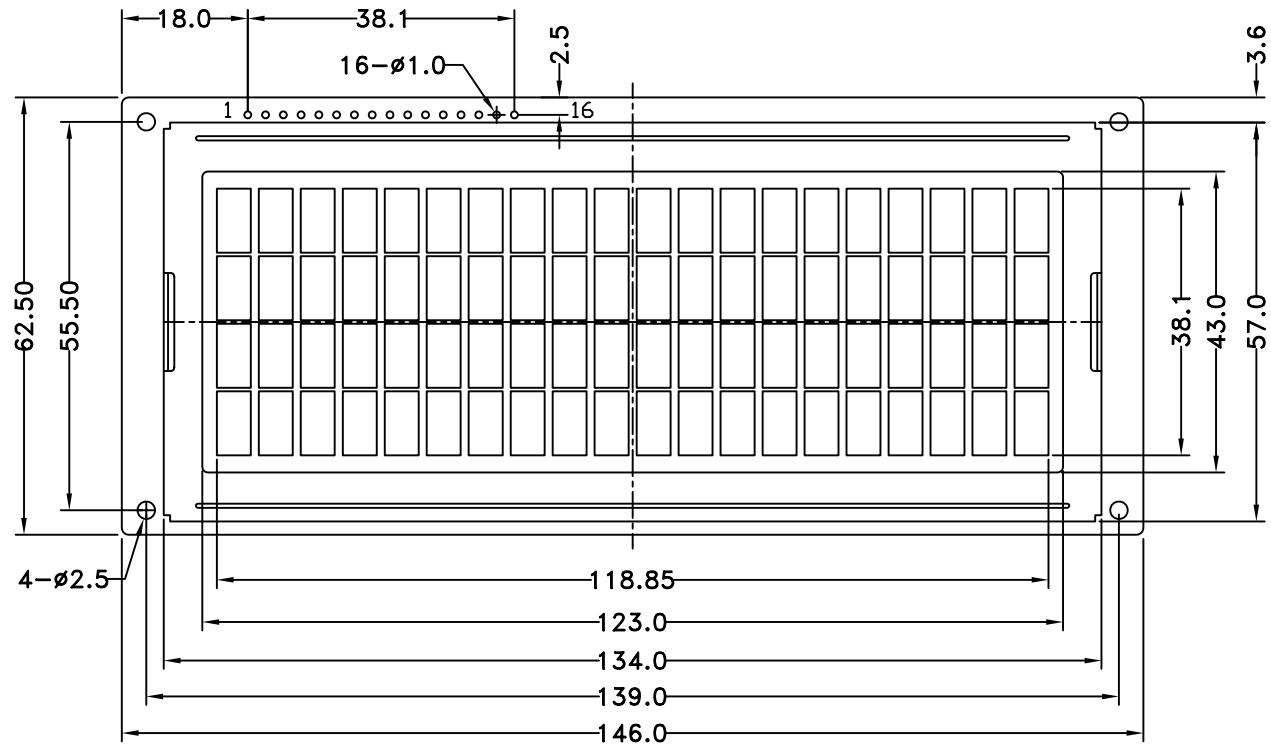




REV	Description	Date
A00	First Issue	2003-MAY-15



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _O	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

- Specifications:**
- 1) STN/+VE/Y-G/Transflective Mode
 - 2) 1/16 Duty, 1/5 Bias, V_{op}=4.5V
 - 3) Viewing Angle = 6 o'clock
 - 4) Op.Temp.= -20 to +70°C
St. Temp.= -30 to +80°C
 - 5) W/ Y-G LED Backlight

Description: MECHANICAL SPECIFICATIONS	
Scale:	 TRI-T COMPANY LIMITED
Sheet : 1 of 1	
Unspecified Tol. ±0.3	Unit mm
Approvals	Date
Draw:	Project Number
Check:	TMBC20468ASP-04
Approve:	Item Number
	Do Not Scale This Drawing
	 Projection