
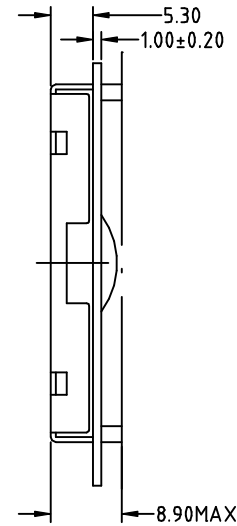
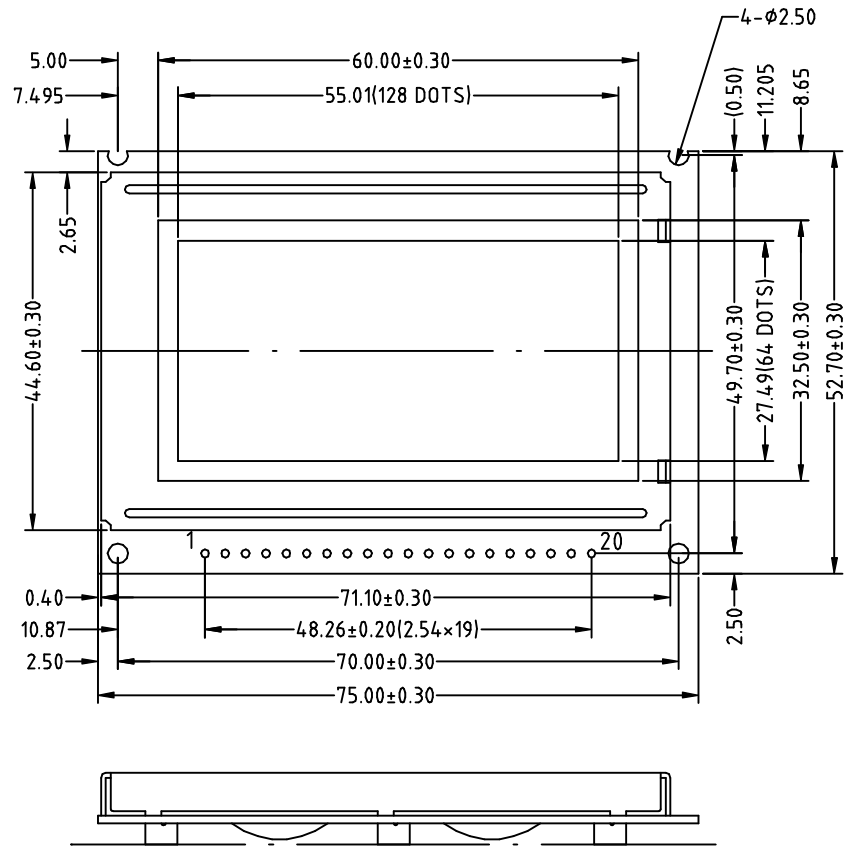


REV	Description	Date
A00	First Issue	2005-MAY-13





PIN CONNECTION

1	VDD
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	CS1
13	CS2
14	RESET
15	R/W
16	DI
17	E
18	FGND
19	ANODE
20	CATHODE

SPECIFICATIONS:

- 1) STN/+VE/Y-G/TRANSFLECTIVE MODE
- 2) 1/64 DUT, 1/9 BIAS, VOP=9.0V
- 3) VIEWING ANGLE= 6 O'CLOCK
- 4) OP. TEMP.= -20°C TO +70°C
ST. TEMP.= -30°C TO +80°C
- 5) WITH Y-G LED BACKLIGHT, 4.1V@90mA
- 6) WITH DC/DC CONVERTER & TEMP. COMPENSATION CIRCUITRY

Description: MECHANICAL SPECIFICATIONS		 TRI-T COMPANY LIMITED		 Projection
Scale: Sheet : 1 of 1				
Unspecified Tol. ±0.3	Unit mm	Project Number TMBG12864EPT-07	Item Number	
Approvals	Date	Do Not Scale This Drawing		
Draw:				
Check:				
Approve:				