
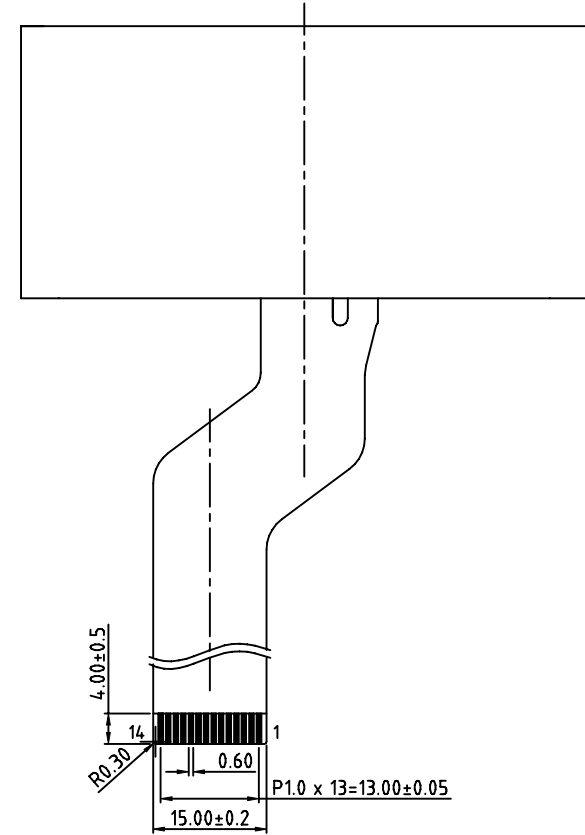
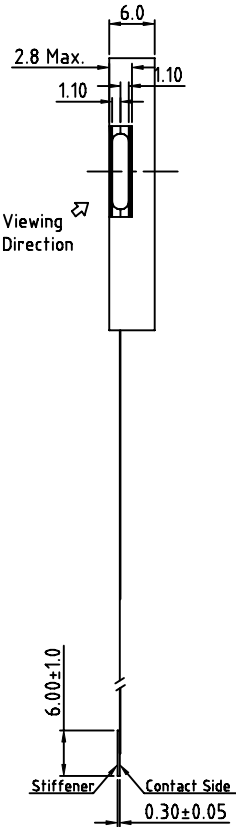


REV	Description	Date
A00	First Issue	2005-JUN-04

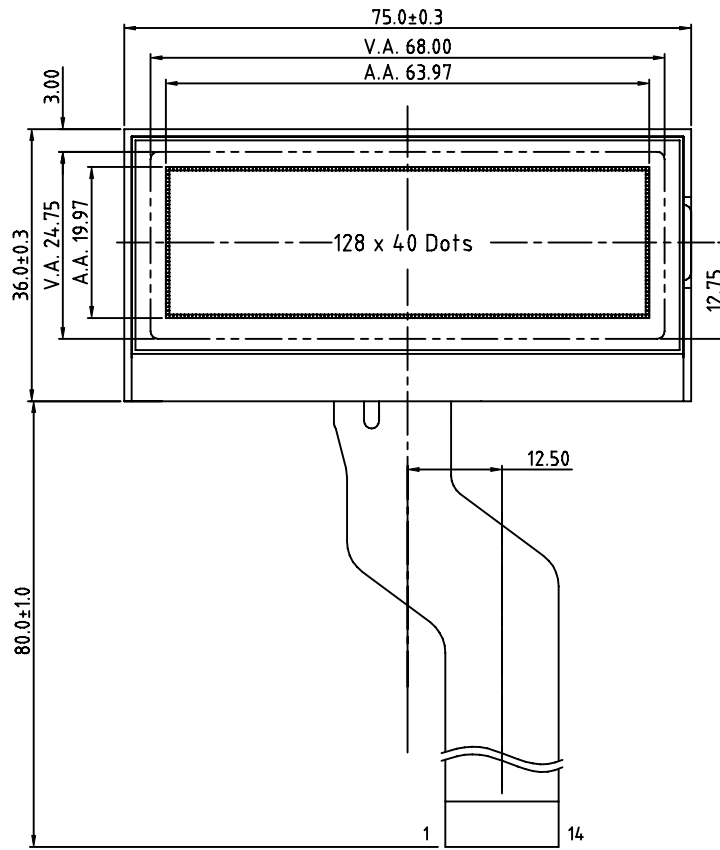




Pin Assignment:

1	A(LED+)
2	K(LED-)
3	C-LCD(VOUT)
4	C1+(VB0+)
5	C1-(VB0-)
6	C2-(VB1-)
7	C2+(VB1+)
8	VSS
9	VDD
10	DATA
11	CLK
12	CD
13	RST
14	CS0

SPECIFICATIONS:

- 1)FSTN/+VE/B&W/TRANSFLECTIVE MODE
- 2)1/49 DUTY, 1/8 BIAS, VLCD=8V
- 3)VIEWING ANGLE= 6 O'CLOCK
- 4)OP.TEMP.=0°C TO +50°C
ST.TEMP=-40°C TO +60°C
- 5) WITH Y-G LED Backlight, 3.3V@100mA, 20cd/m2
- 6) IC: UC1601, Serial I/O, VDD=3.3V



Description: MECHANICAL SPECIFICATIONS	
Scale:	 TRI-T COMPANY LIMITED
Sheet : 1 of 1	
Unspecified Tol. ± 0.3	Unit mm
Approvals	Date
Draw:	Project Number TMGG12840-02
Check:	Item Number
Approve:	Do Not Scale This Drawing
 Projection	