
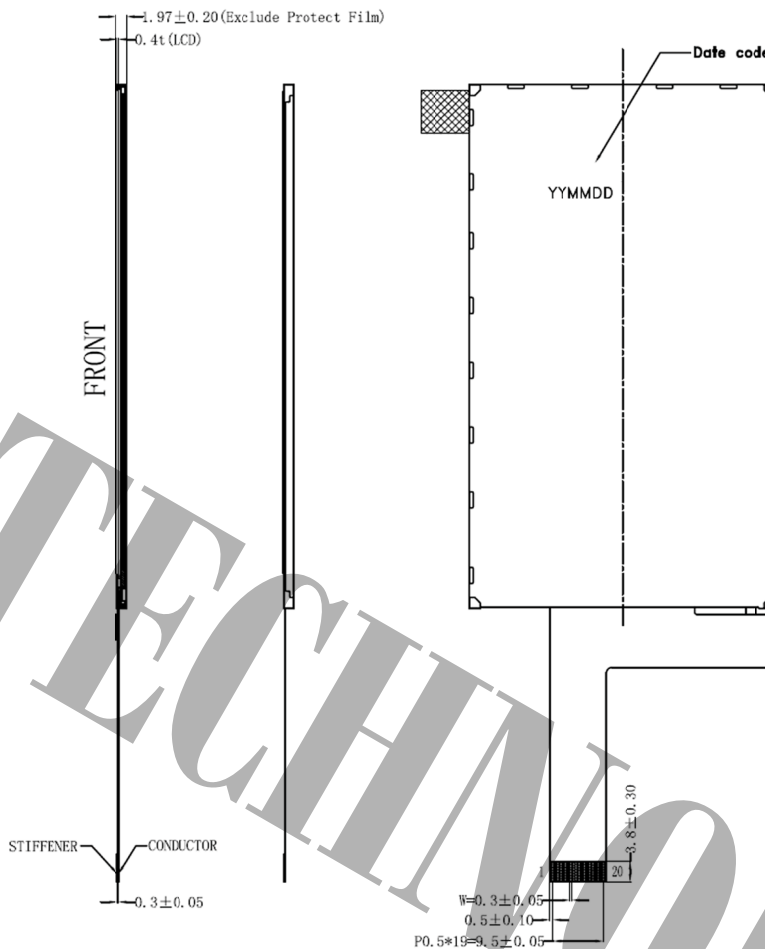



RoHS

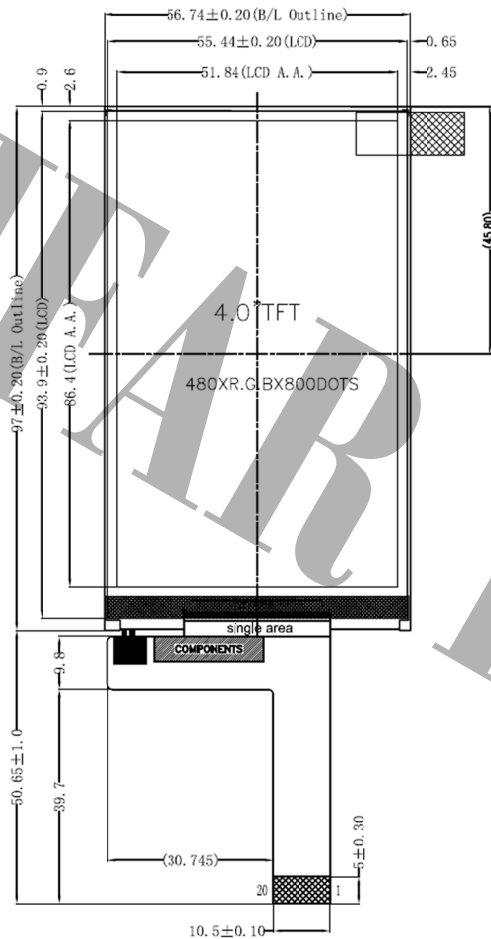

Specification

1.LCD type: a-Si TFT , Normally Black , IPS mode , Transmissive
2.Driver IC: ST7701S
3.View direction: Free
4.Operating temp:-20°C~70°C, Storage temp: -30°C~80°C
5. Luminace(cd/m ²):300(Min.) 9PCS White LED, Vf:28.8V; If:20mA
6. Chromaticity Coordinales:X(w)0.27~0.33 / Y(w)0.34~0.40
7.The tolerance unless classified ±0.30mm
8.Remark:ROHS

電路圖 CIRCUIT DIAGRAM (LED 1*9=9 dies)



PIN	SYMBOL
1	VDDI
2	VCI
3	RESX
4	TE
5	GND
6	D1_P
7	D1_N
8	GND
9	CLK_P
10	CLK_N
11	GND
12	D0_P
13	D0_N
14	GND
15	IM3
16	IM2
17	IM1
18	IM0
19	LED-A
20	LED-K

日期 版本 修改內容

 晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE 2017.12.25 REV 00 DRAWING NO.:

UNIT : mm
SCALE : 1/1

Product : GFT0040AA480800

DRAWN: Hazel CHECKED: Sidney PAGE: 1/1