


FPC弯折示意图
FPC展开出货

PIN	NAME
1	LEDK
2	LEDK
3	GND
4	GND
5	FMARK
6	SDA
7	WR
8	SCL
9	CS
10	RESET
11	IOVCC18
12	IOVCC18
13	VCC28
14	VCC28
15	GND
16	GND
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	LEDA
24	LEDA

Specification

1.LCD type: a-Si TFT , Normally Black , IPS mode , Transmissive
2.Driver IC: ST7789V
3.View direction: All Clock
4.Operating temp:-20°C~70°C, Storage temp: -30°C~80°C
5.Back light:2PCS White LED;Vf:3.2V;If:40mA Luminace(cd/m):withLCD 160(TYPE)
6.建議機殼可視區比TFT LCM V.A區單邊小0.3mm以上
7.The tolerance unless classified ±0.25mm
8.Remark:ROHS

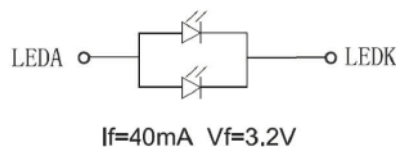

日期	版本	修改內容
171201	00	MD圖面



晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD.

DATE	2017.12.14	REV	00	DRAWING NO.:
UNIT : mm	Product: GFT0013AA240240			
SCALE : 1/1	DRAWN:	Hazel	CHECKED:	
				PAGE: 1/1